


# FLEXCOMP HP/STL-MxM Expansion Compensators

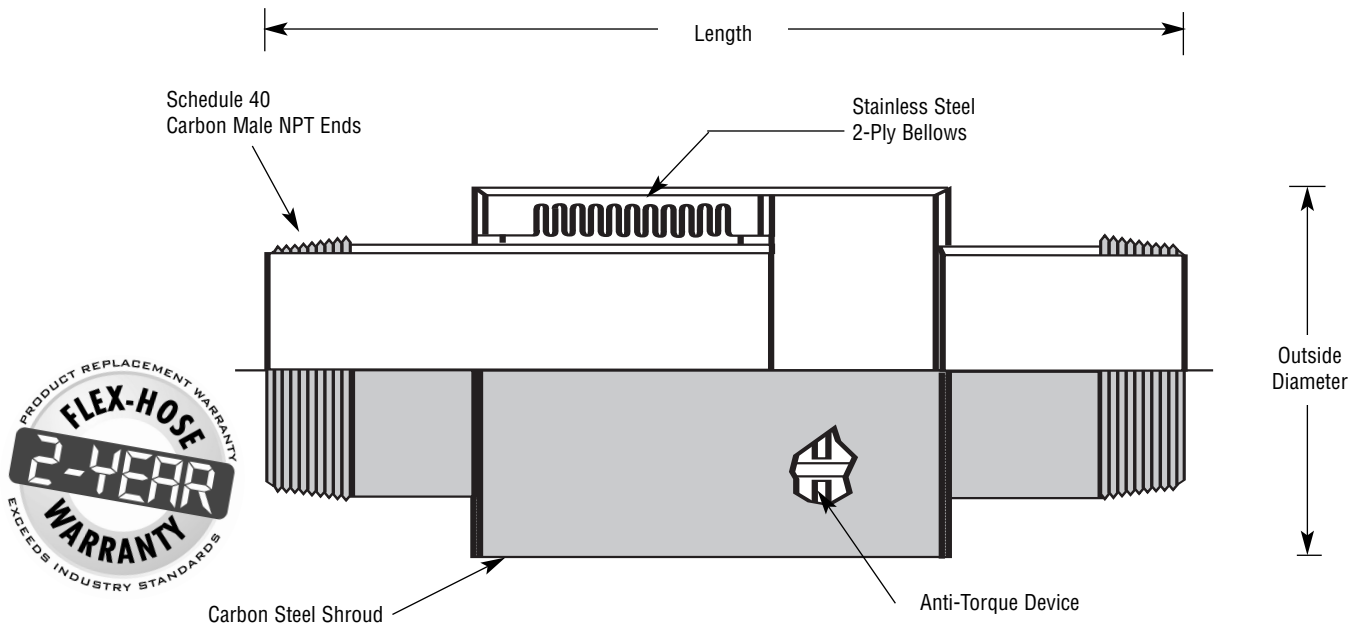

RATED FOR: 10,000 CYCLES @ 1/2 TRAVEL

NOTE: FOR PROPER OPERATION, ALL PIPING MUST BE PROPERLY ANCHORED AND GUIDED.

QTY	I.D. (In.)	Length (In.)	Outside Diameter	Max Pressure (PSI)		Movement Capability		Wt. (Lbs.)	NOTES
				Working	Test	Compression (In.)	Extension (In.)		
	.75	12 $\frac{1}{8}$	3	150	225	1 $\frac{3}{4}$	$\frac{1}{4}$	5.5	
	1.00	12 $\frac{1}{8}$	3 $\frac{1}{2}$	150	225	1 $\frac{3}{4}$	$\frac{1}{4}$	7.0	
	1.25	14 $\frac{1}{8}$	4	150	225	1 $\frac{3}{4}$	$\frac{1}{4}$	10.2	
	1.50	14 $\frac{1}{8}$	4 $\frac{1}{2}$	150	225	1 $\frac{3}{4}$	$\frac{1}{4}$	12.3	
	2.00	14 $\frac{1}{2}$	4 $\frac{1}{2}$	150	225	1 $\frac{3}{4}$	$\frac{1}{4}$	13.2	
	2.50	15 $\frac{1}{2}$	5 $\frac{1}{2}$	150	225	1 $\frac{3}{4}$	$\frac{1}{4}$	19.6	
	3.00	15 $\frac{3}{16}$	6 $\frac{1}{2}$	150	225	1 $\frac{3}{4}$	$\frac{1}{4}$	24.4	
	4.00	15 $\frac{3}{16}$	7 $\frac{3}{32}$	150	225	1 $\frac{3}{4}$	$\frac{1}{4}$	27.5	



CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.

This product is produced with stainless steel bellows. Stainless steel components should not be used in systems containing excessive chlorides. Premature failure may result.

MAXIMUM SERVICE TEMPERATURE IS 750°F

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



6801 Crossbow Drive  
 East Syracuse, NY USA 13057-1026  
 315/437-1611 • Fax 315/437-1903  
 www.flexhose.com • 1.877.TRI FLEX

REV. 8/02-C

WS20160113