


# FLEXPRESS™ FP-D/150 Externally Pressurized Guided Expansion Joints



Maximum Temperature 650°F

Design Pressure 150 PSIG • Test Pressure 225 PSIG					
Qty	I.D. (In.)	Bellows Area (Sq. In.)	Length (In.)	Movement Capability (In.)	Weight (Lbs.)
□	2.00	12	43.25	8.00	70.00
			61.25	12.00	95.00
			75.25	16.00	112.00
□	2.50	12	43.25	8.00	79.00
			61.25	12.00	106.00
			75.25	16.00	126.00
□	3.00	16	41.25	8.00	98.00
			54.25	12.00	120.00
			71.25	16.00	154.00
□	4.00	30	42.50	8.00	153.00
			56.00	12.00	188.00
			73.75	16.00	242.00
□	5.00	42	40.25	8.00	200.00
			52.50	12.00	242.00
			64.75	16.00	286.00
□	6.00	53	40.25	8.00	222.00
			52.50	12.00	268.00
			64.75	16.00	316.00
□	8.00	83	42.50	8.00	320.00
			55.75	12.00	414.00
			69.00	16.00	490.00
□	10.00	135	45.25	8.00	450.00
			59.50	12.00	554.00
			78.00	16.00	706.00
□	12.00	182	47.25	8.00	583.00
			62.50	12.00	717.00
			81.75	16.00	907.00
□	14.00	212	47.50	8.00	709.00
			62.75	12.00	857.00
			82.00	16.00	1069.00
□	16.00	276	48.00	8.00	774.00
			63.25	12.00	940.00
			82.50	16.00	1176.00
□	18.00	338	48.25	8.00	893.00
			63.50	12.00	1077.00
			82.75	16.00	1341.00
□	20.00	404	49.00	8.00	1054.00
			64.25	12.00	1254.00
			83.50	16.00	1544.00
□	22.00	481	49.25	8.00	1128.00
			64.50	12.00	1348.00
			84.75	16.00	1662.00
□	24.00	562	49.50	8.00	1292.00
			64.75	12.00	1528.00
			84.00	16.00	1870.00

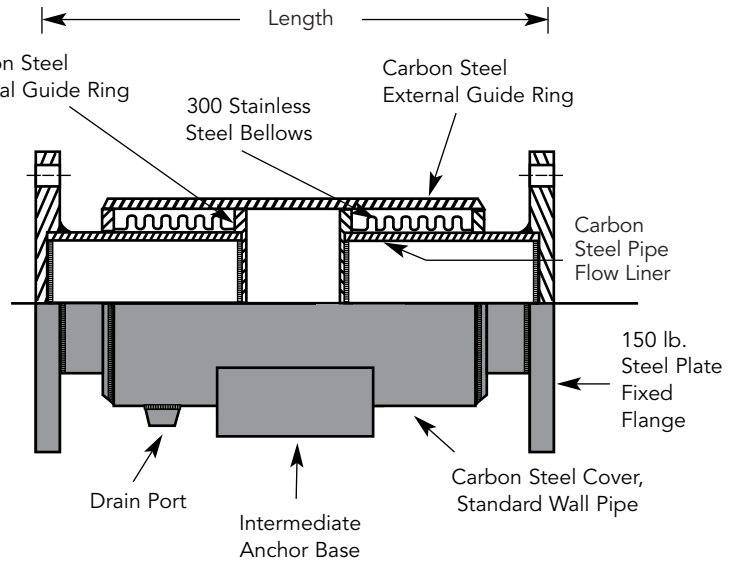

**Notes**



CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.



6801 Crossbow Drive  
 East Syracuse, NY USA 13057-1026  
 315/437-1611 • Fax 315/437-1903  
 www.flexhose.com • 1.877.METAL EJ

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	

WS201508