


FLEXZORBER® EED EPDM Double Sphere Flanged



I.D. (IN)	LENGTH (IN)	PRESSURE (PSI)		VAC RATING (in Hg.)	MOVEMENT CAPABILITY			ANGULAR (Deg)	FLANGE DIMS NO. BOLT HOLES	HOLE SIZE	(LBS)
		200°F	240°F		COMPRESSION (IN)	EXTENSION (IN)	PARALLEL (IN)				
2.0	7	225	150	26	1	3/4	1	30°	4	3/4	9
2.5	7	225	150	26	1	3/4	1	30°	4	3/4	13
3.0	7	225	150	26	1	3/4	1	30°	4	3/4	15
4.0	9	225	150	26	1 1/4	1	1 1/4	30°	8	3/4	20
5.0	9	225	150	26	1 1/4	1	1 1/4	30°	8	7/8	26
6.0	9	225	150	26	1 1/4	1	1 1/4	30°	8	7/8	29
8.0	13	225	150	26	1 1/2	1	1 3/8	30°	8	7/8	45
10.0	13	225	150	26	1 1/2	1	1 3/8	30°	12	1	63
12.0	13	225	150	26	1 1/2	1	1 3/8	30°	12	1	95
14.0	13 3/4	125	100	26	1 1/2	1 3/16	1 3/16	20°	12	1 1/8	112



*ANSI Class 150 lb. Steel Floating Flanges

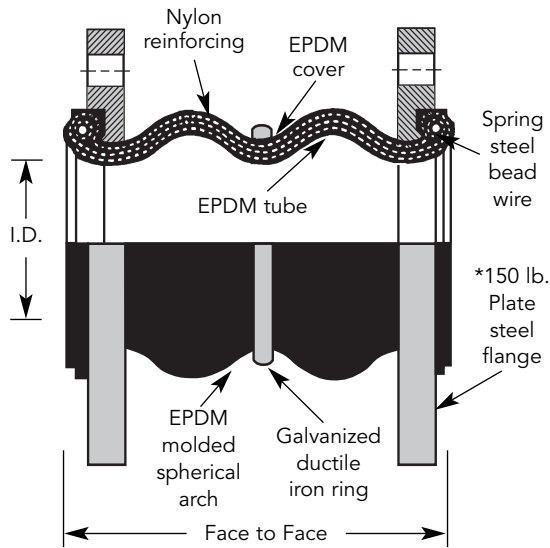

CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.

FLEXZORBER® MOVEMENTS

Flex-Hose Co.'s FLEXZORBER® rubber connectors & expansion joints are capable of handling the following movements:

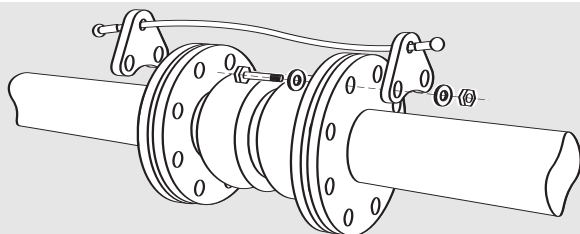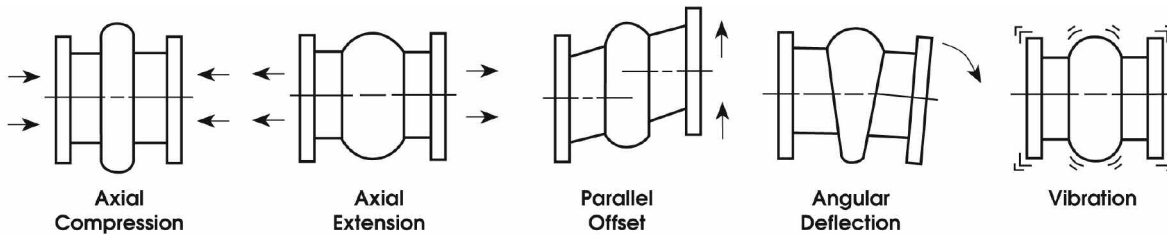

StopLink™ Control Units for Rubber Connectors & Expansion Joints

Unrestrained, most rubber expansion joints and connectors will extend when pressurized. Therefore, it is recommended the system be anchored. When anchoring is not practical, control units must be used.

StopLink™ are available in pipe sizes 2"-12". Conventional control rod assemblies will be supplied, when required, for other sizes.

StopLink™ Control Units Required: YES NO

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



6801 Crossbow Drive
 East Syracuse, NY USA 13057-1026
 315/437-1611 • Fax 315/437-1903
 www.flexhose.com • 1.877.TRI FLEX



WS201508

REV 05/14

RUBBER CONNECTORS/EXPANSION JOINTS

EED 2"-14" I.D.