


FLEXZORBER® NNDFU Double Sphere Union




CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.

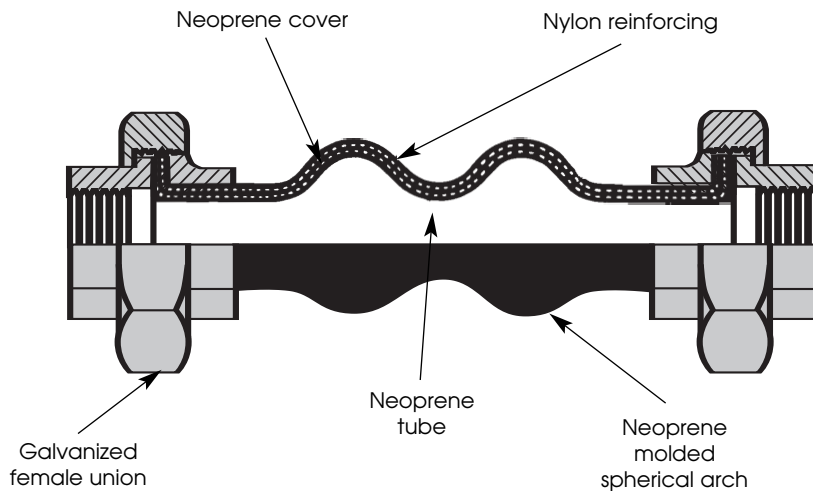

I.D. (IN)	LENGTH (IN)	PRESSURE (PSI)		VAC RATING (in Hg.)	MOVEMENT CAPABILITY				WT. (LBS)
		170°F	220°F		COMPRESSION (IN)	EXTENSION (IN)	PARALLEL (IN)	ANGULAR (Deg)	
3/4	8	150	100	16	7/8	1/4	7/8	45°	2
1.0	8	150	100	16	7/8	1/4	7/8	45°	3
1.25	8	150	100	16	7/8	1/4	7/8	45°	3
1.5	8	150	100	16	7/8	1/4	7/8	45°	4
2.0	8	150	100	16	7/8	1/4	7/8	45°	6

FLEXZORBER® MOVEMENTS

Flex-Hose Co.'s FLEXZORBER® rubber connectors & expansion joints are capable of handling the following movements:

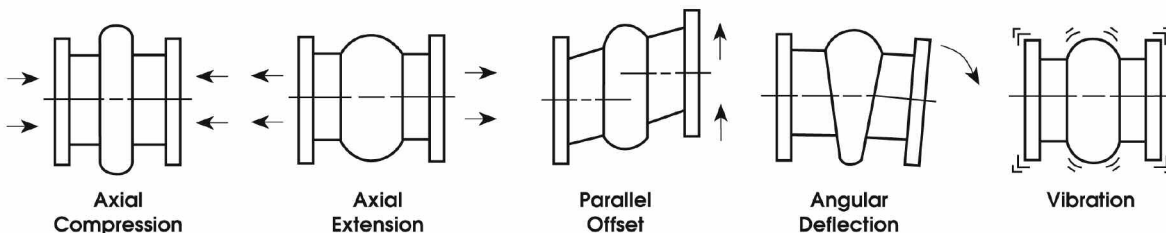

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



6801 Crossbow Drive
 East Syracuse, NY USA 13057-1026
 315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX

WS201508

REV 05/14