


Pumpsaver® Braided Pump Connectors

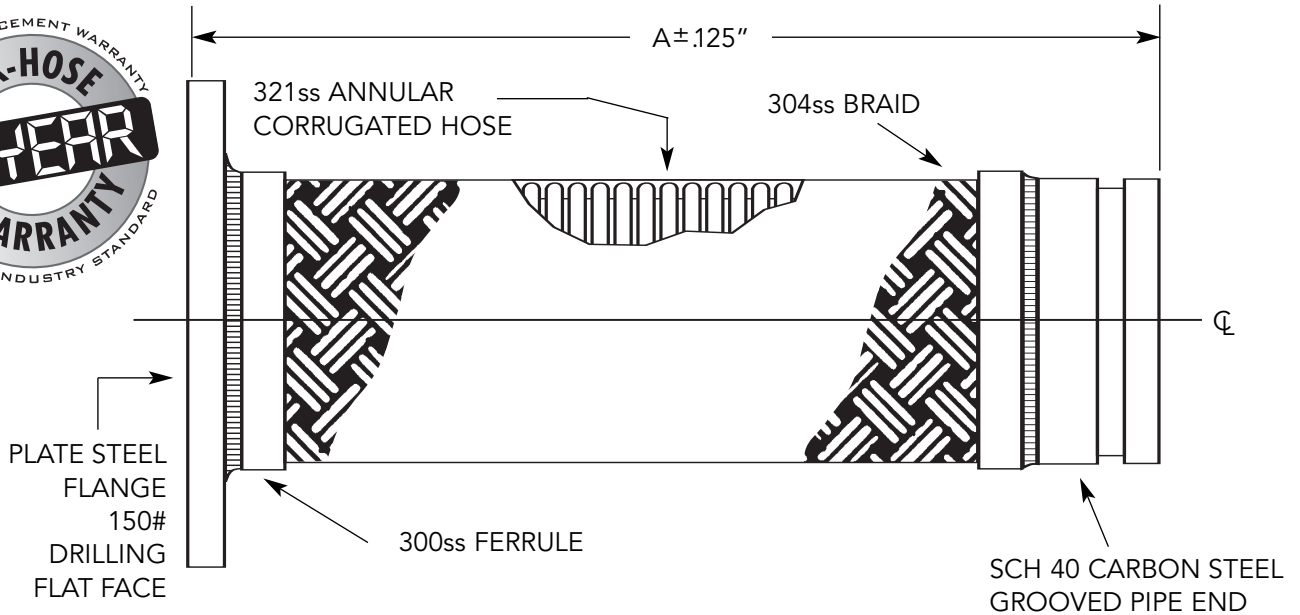

FOR TEMP ABOVE 70°F	
TEMP °F	FACTOR S.S.
70	1.00
200	.94
300	.88
400	.83
500	.78
600	.74

Qty	I.D. (In.)	A (In.)	Pressure (PSI) 70°F	Parallel Offset (In.) Permanent	Intermittent	Weight (lb)	Notes
	2.00	12.00	500	1 7/8	5/8	7.20	
	2.50	12.00	385	1 5/8	5/8	8.50	
	3.00	12.00	285	1 1/8	1/2	10.40	
	4.00	12.00	230	5/8	1/4	14.00	
	5.00	14.00	190	7/8	3/8	18.40	
	6.00	14.00	165	3/4	3/8	23.70	
	8.00	15.00	180	5/8	1/4	39.60	
	10.00	16.00	170	1/2	1/4	61.50	
	12.00	17.00	145	1/2	1/4	81.00	

*For safe working pressure above 70°F, multiply pressure shown at 70°F times correction factor of required temp.

*Working pressures shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor.



CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.



PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



6801 Crossbow Drive
 East Syracuse, NY USA 13057-1026
 315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX

WS201509

STAINLESS STEEL PUMP CONNECTORS

SF-15PxVG 2"-12" I.D.