

Tri-Flex Loop® Expansion Loops and Seismic Connectors



I.D. (IN.)	LENGTH (IN.)		PRESSURE (PSI) @ Ambient Temperature	MOVEMENTS					DRAIN PORT	SPRING RATE @125PSI	WT. (LBS)
	A	B		COMPRESSION (IN.)	EXTENSION (IN.)	PARALLEL (IN.)	ROTATION "X" AXIS (°)	NON-PARALLEL "Y" AXIS (IN.)			
TFL2SMN											
1.0	21.00	15.75	175	2	2	2	20°	1	½	7	6
1.25	25.00	18.00	175	2	2	2	15°	1	½	9	8
1.5	27.00	19.50	175	2	2	2	15°	1	½	10	11
2.0	31.00	22.25	175	2	2	2	10°	1	½	13	15
2.5	35.00	25.00	175	2	2	2	10°	1	¾	23	27
3.0	39.25	28.00	175	2	2	2	10°	1	¾	33	37
4.0	48.75	33.00	175	2	2	2	5°	1	¾	53	64


Manufactured with 5:1 safety factor. All Tri-Flex Loops are 100% hydrostatic tested at the factory to 262 psig.

U.S. PATENT NO. 5,803,506



LISTED

Tri-Flex Loop® Stainless steel 1"-4" for compressed and combustible gases at pressures not exceeding 175 psi at ambient temperature 33NB

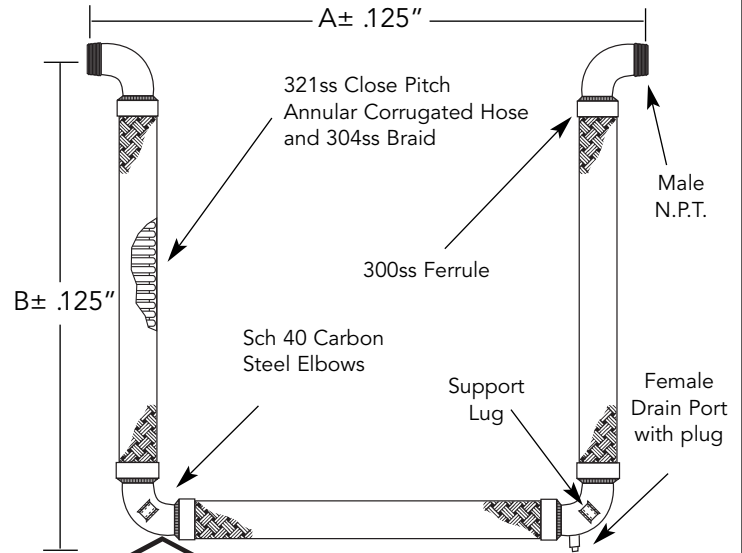

APPROVED


For Fire Protection Systems



CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.

Tri-Flex Loop® Movement Capabilities

Tri-Flex Loop is capable of handling the following movements simultaneously:

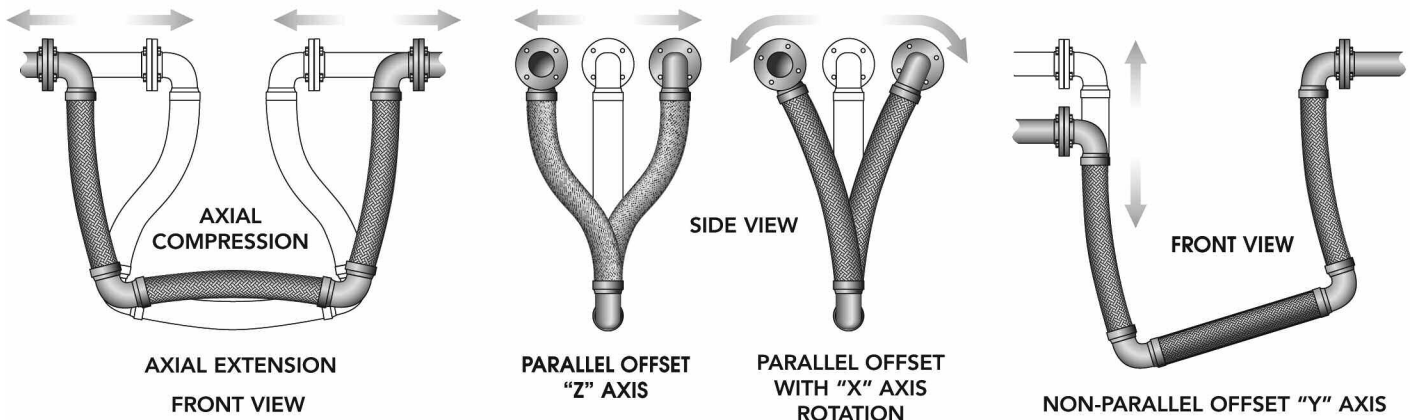

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



6801 Crossbow Drive
 East Syracuse, NY USA 13057-1026
 315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX

WS201508