


FLEX-HOSE CO., INC. 

Tri-Flex Loop[®] Hanger Assembly Kit and Accessories

 Listed • Color Coded • Pre-stretched • Breakstrength Certified



Simple & Reliable.

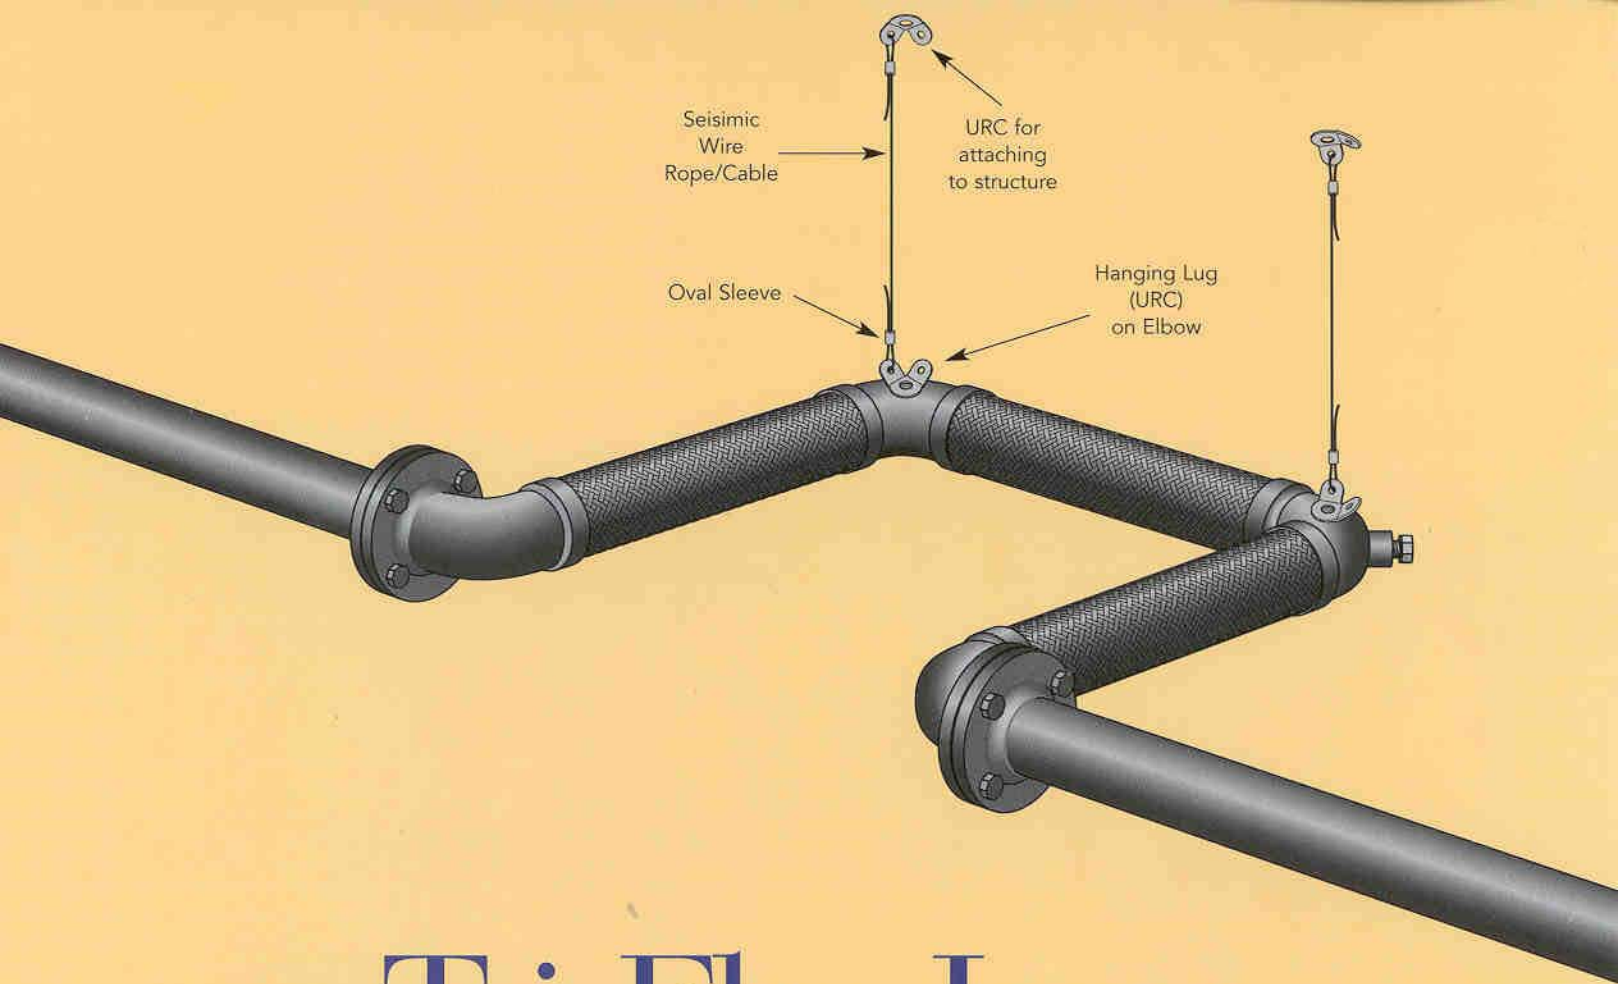

Tri-Flex Loop[®] Hanger Assembly Kit and Accessories...

It's Simple and Reliable.

Safety and performance has always been the heart of our products design. The UL Listed Tri-Flex Loop Hanger Assembly Kit saves valuable time on Tri-Flex Loop installation, making it easy to support and hang the revolutionary Tri-Flex Loop.

The UL Listed Seismic Wire Rope/Cable™ used in our hanger assemblies conform to the requirements of the ASCE (American Society of Civil Engineers) guidelines for structural applications of wire rope, in that the cable is pre-stretched and the permanent end fittings maintain the breakstrength of the cable with a safety factor of two.



Listed • Color Coded • Pre-stretched • Breakstrength Certified

www.flexhose.com • 1-877-tri-flex

Simple & Reliable.

The UL Listed Seismic Wire Rope/Cable™ used in our hanger assemblies conform to the requirements of the ASCE (American Society of Civil Engineers) guidelines for structured applications of wire rope, in that the cable is pre-stretched and the permanent end fittings maintain the breakstrength of the cable with a safety factor of two.

Tri-Flex Loop Red Cable Kit

For installation of Tri-Flex Loops up to 8" diameter



Use **RED CABLE** kit for installing all Tri-Flex Loops up to 8" in diameter.



Contents of kit:

- 2 URC (universal restraint) clips for attaching to structure
- 4 zinc-plated copper oval sleeves
- 2 red cables, 13 ft. long



Also needed:

- #C7 Felco cable cutter
- #1-3SBHS crimping tool

(Tools available separately and not provided in kit)

Tri-Flex Loop Blue Cable Kit

For installation of Tri-Flex Loops up to 10" and 12" diameter



Use **BLUE CABLE** kit for installing all Tri-Flex Loops of 10" and 12" in diameter.



Contents of kit:

- 2 URC (universal restraint) clips for attaching to structure
- 4 zinc-plated copper oval sleeves
- 2 blue cables, 13 ft. long



Also needed:


- #C9 Felco cable cutter
- #1-SBHS crimping tool

(Tools available separately and not provided in kit)

Consult factory for cable kit for installation of larger Tri-Flex Loops



Make the Right Connection with our Representative:

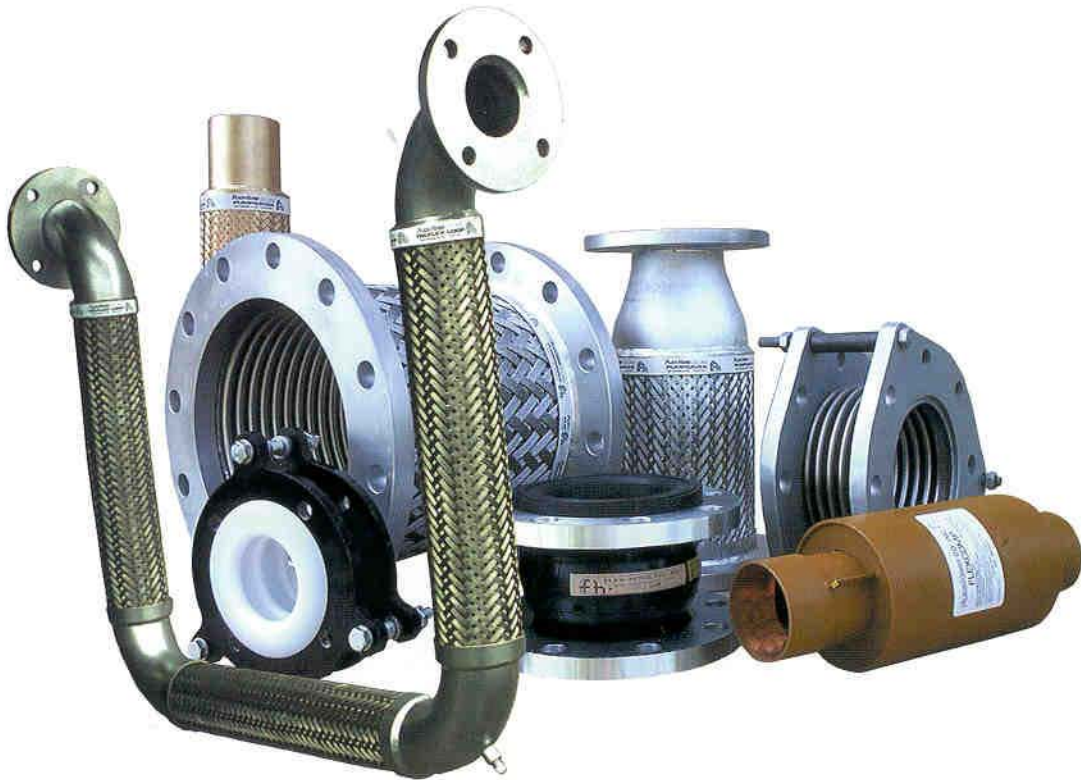

***FLEX-HOSE* CO., INC.** 

6801 Crossbow Drive • East Syracuse, New York 13057-1026

Telephone 315.437.1611 • Fax 315.437.1903

Toll Free 1-877-Tri-Flex (874-3539)

email: flexhose@flexhose.com

Visit us on the web

www.flexhose.com