


Try-Flex Loop® Expansion Loops & Seismic Connectors

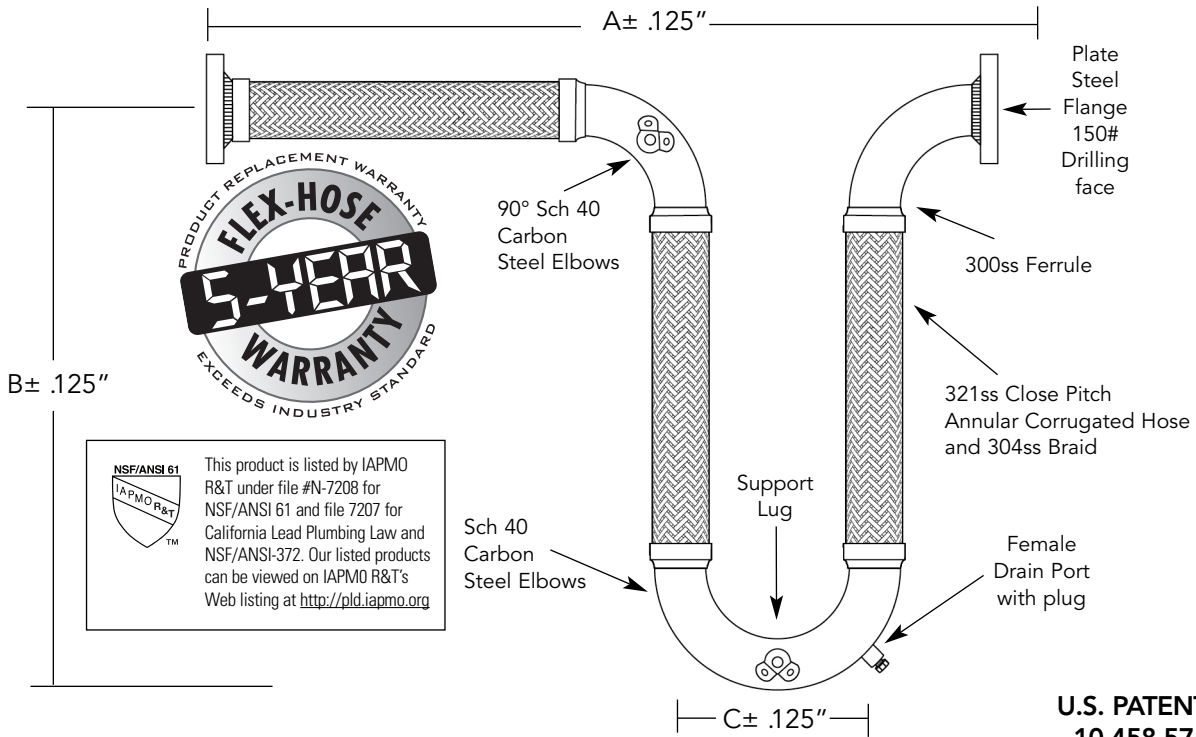

QTY.	PIPE SIZE (IN.)	DIMENSIONS (IN.)			PRESSURE (PSI)		COMPRESSION (IN.)	EXTENSION (IN.)	PARALLEL (IN.)	ROTATION "X" AXIS (DEG)	NON-PARALLEL "Y" AXIS (DEG)	DRAIN PORT (IN.)	WT. (LBS.)	NOTES
		A	B	C	70°F	200°F								
	1.00	23.75	15.75	6.50	750	705	2	2	2	20°	1	¼	8.6	
	1.25	26.75	18.00	6.75	725	681	2	2	2	15°	1	½	11.0	
	1.5	27.88	19.50	6.50	565	531	2	2	2	15°	1	½	13.0	
	2	31.63	22.25	7.75	500	470	2	2	2	10°	1	½	22.0	
	2.5	35.13	25.00	8.75	400	376	2	2	2	10°	1	¾	36.0	
	3	38.13	28.00	9.00	285	267	2	2	2	10°	1	¾	47.0	
	4	43.63	33.00	12.00	250	235	2	2	2	5°	1	¾	72.0	
	5.0	54.50	41.25	15.00	200	188	2	2	2	5°	1	¾	120.0	
	6.0	60.63	45.00	18.00	220	206	2	2	2	3°	1	¾	158.0	
	8.0	74.25	53.25	24.00	215	202	2	2	2	ON APPLICATION	1	¾	310.0	
	10.00	89.25	68.38	30.00	200	188	2	2	2	ON APPLICATION	1	¾	506.0	
	12.00	103.25	72.38	36.00	160	150	2	2	2	ON APPLICATION	1	¾	748.0	

MOVEMENT CAPABILITY: +/-2"

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
 Liverpool, New York USA 13088-2509
 315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX