


Try-Flex Loop® Expansion Loops & Seismic Connectors

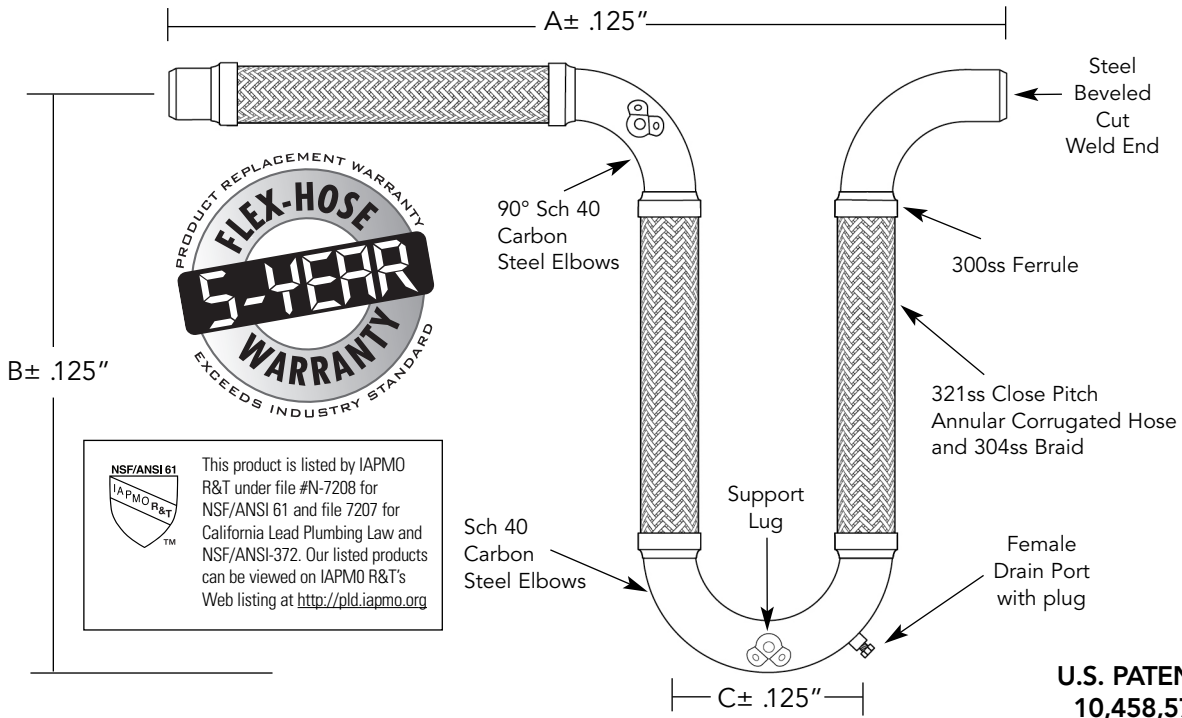

U.S. PATENT NO.
10,458,575 B2

QTY.	PIPE SIZE (IN.)	DIMENSIONS (IN.)			PRESSURE (PSI)		COMPRESSION (IN.)	EXTENSION (IN.)	PARALLEL (IN.)	ROTATION "X" AXIS (DEG)	NON-PARALLEL "Y" AXIS (DEG)	DRAIN PORT (IN.)	WT. (LBS.)	NOTES
		A	B	C	70°F	200°F								
	1/2	23.50	14.00	5.50	1100	1034	2	2	2	25°	1	1/4	2.0	
	3/4	24.75	14.50	6.25	800	752	2	2	2	20°	1	1/4	2.8	
	1	27.50	15.75	6.50	750	705	2	2	2	20°	1	1/2	4.9	
	1.25	34.00	18.00	6.75	725	681	2	2	2	15°	1	1/2	7.6	
	1.5	37.00	19.50	6.50	565	531	2	2	2	15°	1	1/2	9.7	
	2	35.75	22.25	7.75	500	470	2	2	2	10°	1	1/2	15.0	
	2.5	39.25	25.00	8.75	400	376	2	2	2	10°	1	3/4	27.0	
	3	45.25	28.00	9.00	285	267	2	2	2	10°	1	3/4	38.0	
	4	50.75	33.00	12.00	250	235	2	2	2	5°	1	3/4	63.0	
	5	61.50	41.25	15.00	200	188	2	2	2	5°	1	3/4	109.0	
	6	68.63	45.00	18.00	220	206	2	2	2	3°	1	3/4	149.0	
	8	85.00	53.25	24.00	215	202	2	2	2	ON APPLICATION	1	3/4	293.0	
	10	104.00	63.38	30.00	200	188	2	2	2	ON APPLICATION	1	3/4	507.0	
	12	120.00	72.38	36.00	160	150	2	2	2	ON APPLICATION	1	3/4	746.0	

MOVEMENT CAPABILITY: +/-2"

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
Liverpool, New York USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX