


Try-Flex Loop® Expansion Loops & Seismic Connectors

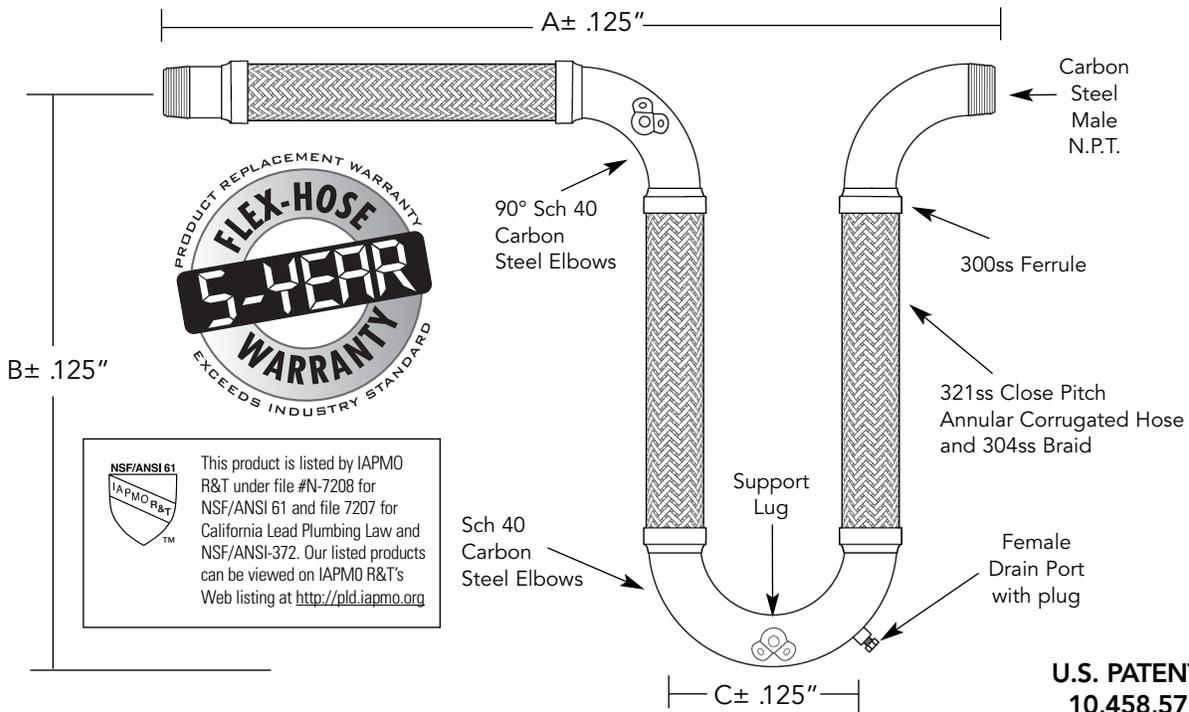

**U.S. PATENT NO.
10,458,575 B2**

QTY.	PIPE SIZE (IN.)	DIMENSIONS (IN.)			PRESSURE (PSI)		COMPRESSION (IN.)	EXTENSION (IN.)	PARALLEL (IN.)	ROTATION "X" AXIS (DEG)	NON-PARALLEL "Y" AXIS (DEG)	DRAIN PORT (IN.)	WT. (LBS.)	NOTES
		A	B	C	70°F	200°F								
	½	29.50	18.00	9.50	1100	1034	4	4	4	35°	2	¼	2.2	
	¾	31.25	18.50	10.25	800	752	4	4	4	35°	2	¼	3.0	
	1	33.25	20.50	10.50	750	705	4	4	4	30°	2	½	5.2	
	1.25	36.38	22.50	10.75	725	681	4	4	4	25°	2	½	7.3	
	1.5	38.00	24.50	10.50	565	531	4	4	4	25°	2	½	8.9	
	2	42.75	28.25	11.75	500	470	4	4	4	20°	2	½	17.0	
	2.5	45.50	31.00	12.00	400	376	4	4	4	20°	2	¾	29.0	
	3	48.75	34.00	12.50	285	267	4	4	4	15°	2	¾	39.0	
	4	56.00	40.00	14.25	250	235	4	4	4	10°	2	¾	65.0	

MOVEMENT CAPABILITY: +/-4"

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
 Liverpool, New York USA 13088-2509
 315/437-1611 • Fax 315/437-1903
 www.flexhose.com • 1.877.TRI FLEX

FHTRYL4SMN ½"-4" I.D.