


Try-Flex Loop® Expansion Loops & Seismic Connectors

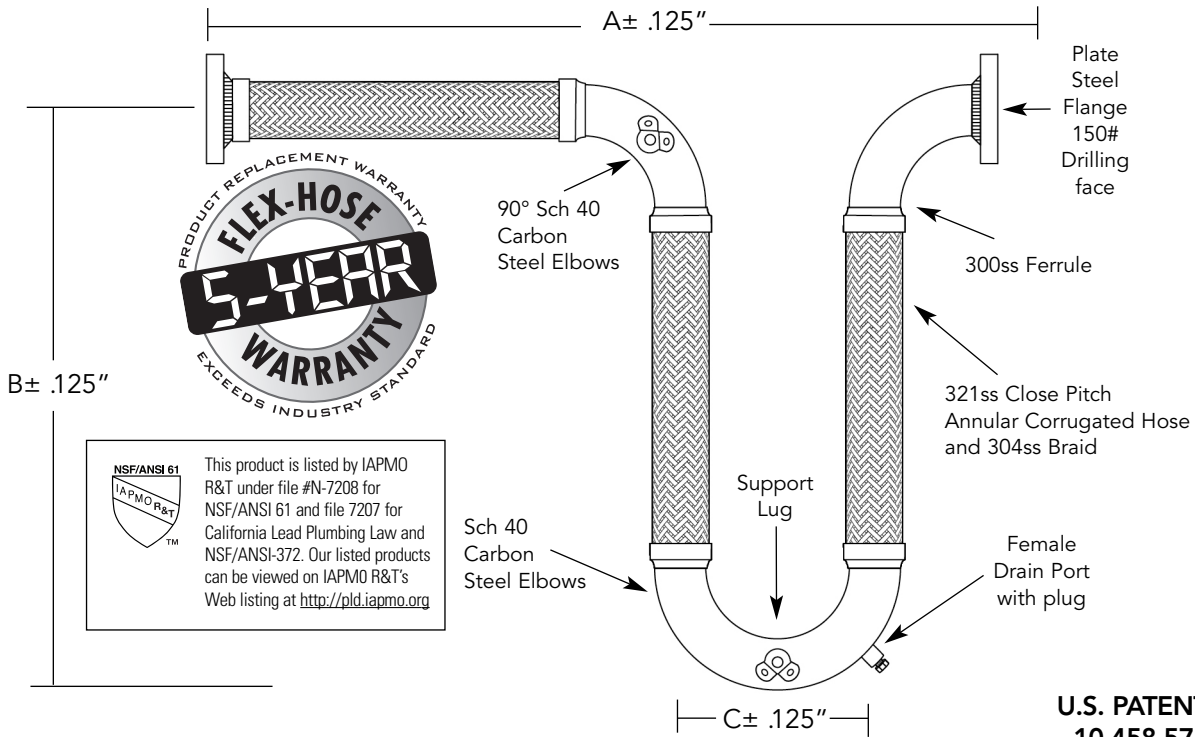

| QTY. | PIPE SIZE (IN.) | DIMENSIONS (IN.) | | | PRESSURE (PSI) | | COMPRESSION (IN.) | EXTENSION (IN.) | PARALLEL (IN.) | ROTATION "X" AXIS (DEG) | NON-PARALLEL "Y" AXIS (DEG) | DRAIN PORT (IN.) | WT. (LBS.) | NOTES |
|-------|-----------------|------------------|-------|-----|----------------|-------|-------------------|-----------------|----------------|-------------------------|-----------------------------|------------------|------------|-------|
| | | A | B | C | 70°F | 200°F | | | | | | | | |
| 1.00 | 32.50 | 20.50 | 10.50 | 750 | 705 | 4 | 4 | 4 | 30° | 2 | ¼ | 9.4 | | |
| 1.25 | 35.13 | 22.50 | 10.75 | 725 | 681 | 4 | 4 | 4 | 25° | 2 | ½ | 12.0 | | |
| 1.5 | 36.88 | 24.50 | 10.50 | 565 | 531 | 4 | 4 | 4 | 25° | 2 | ½ | 14.0 | | |
| 2 | 41.63 | 28.25 | 11.75 | 500 | 470 | 4 | 4 | 4 | 20° | 2 | ½ | 24.0 | | |
| 2.5 | 44.38 | 31.00 | 12.00 | 400 | 376 | 4 | 4 | 4 | 20° | 2 | ¾ | 39.0 | | |
| 3 | 47.63 | 34.00 | 12.50 | 285 | 267 | 4 | 4 | 4 | 15° | 2 | ¾ | 51.0 | | |
| 4 | 52.88 | 40.00 | 14.25 | 250 | 235 | 4 | 4 | 4 | 10° | 2 | ¾ | 77.0 | | |
| 5.0 | 64.25 | 51.00 | 15.00 | 200 | 188 | 4 | 4 | 4 | 10° | 2 | ¾ | 142.0 | | |
| 6.0 | 70.00 | 54.25 | 18.00 | 220 | 206 | 4 | 4 | 4 | 5° | 2 | ¾ | 170.0 | | |
| 8.0 | 84.25 | 63.25 | 24.00 | 215 | 202 | 4 | 4 | 4 | 5° | 2 | ¾ | 333.0 | | |
| 10.00 | 100.25 | 74.38 | 30.00 | 200 | 188 | 4 | 4 | 4 | 3° | 2 | ¾ | 542.0 | | |
| 12.00 | 115.25 | 84.38 | 36.00 | 160 | 150 | 4 | 4 | 4 | 3° | 2 | ¾ | 803.0 | | |

MOVEMENT CAPABILITY: +/-4"

| | |
|----------------|--|
| PROJECT | |
| CUSTOMER | |
| ENGINEER | |
| REPRESENTATIVE | |
| DRAWING # | |



4560 Buckley Road
Liverpool, New York USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX