


# Try-Flex Loop® Expansion Loops & Seismic Connectors

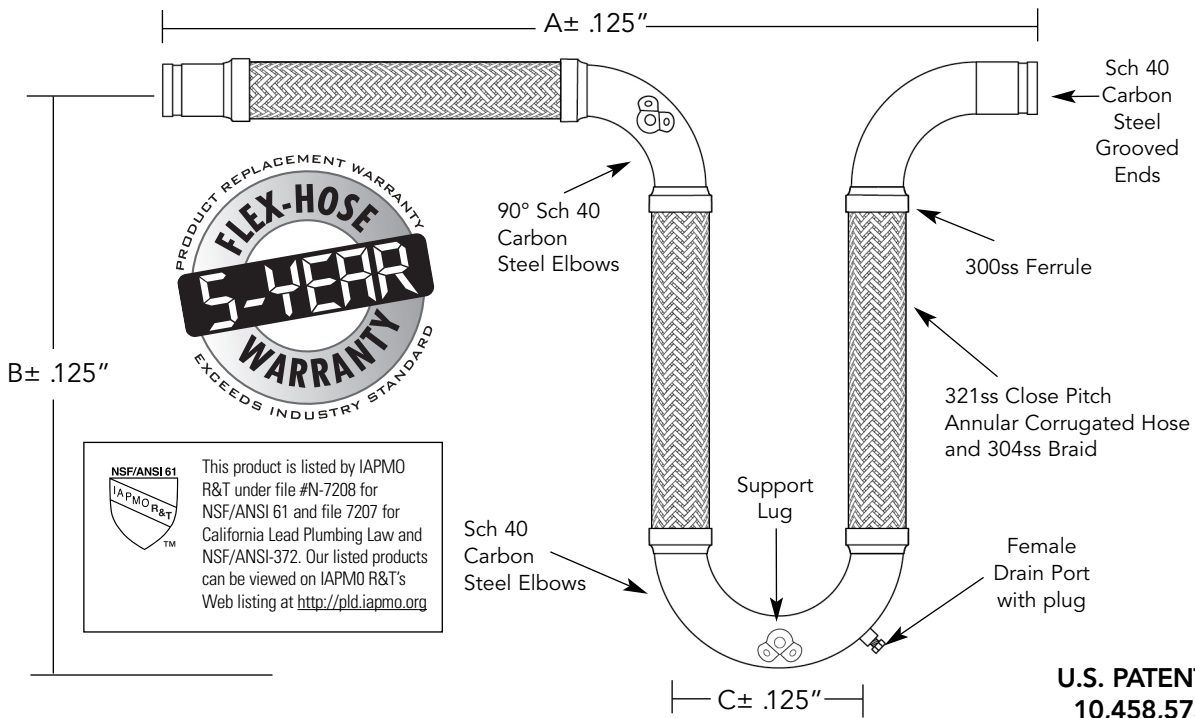

QTY.	PIPE SIZE (IN.)	DIMENSIONS (IN.)			PRESSURE (PSI)		COMPRESSION (IN.)	EXTENSION (IN.)	PARALLEL (IN.)	ROTATION "X" AXIS (DEG)	NON-PARALLEL "Y" AXIS (DEG)	DRAIN PORT (IN.)	WT. (LBS.)	NOTES
		A	B	C	70°F	200°F								
	1.25	36.38	22.50	10.75	725	681	4	4	4	25°	2	½	7.3	
	1.5	38.00	24.50	10.50	565	531	4	4	4	25°	2	½	8.9	
	2	42.75	28.25	11.75	500	470	4	4	4	20°	2	½	17.0	
	2.5	45.50	31.00	12.00	400	376	4	4	4	20°	2	¾	29.0	
	3	48.75	34.00	12.50	285	267	4	4	4	15°	2	¾	39.0	
	4	58.00	40.00	14.25	250	235	4	4	4	10°	2	¾	66.0	
	5.0	71.25	51.00	15.00	200	188	4	4	4	10°	2	¾	130.0	
	6.0	78.00	54.25	18.00	220	206	4	4	4	5°	2	¾	161.0	
	8.0	92.00	63.25	24.00	215	202	4	4	4	5°	2	¾	309.0	
	10.00	110.00	74.38	30.00	200	188	4	4	4	3°	2	¾	526.0	
	12.00	125.00	84.38	36.00	160	150	4	4	4	3°	2	¾	769.0	

MOVEMENT CAPABILITY: +/-4"

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road  
 Liverpool, New York USA 13088-2509  
 315/437-1611 • Fax 315/437-1903  
[www.flexhose.com](http://www.flexhose.com) • 1.877.TRI FLEX