


Try-Flex Loop® Expansion Loops & Seismic Connectors

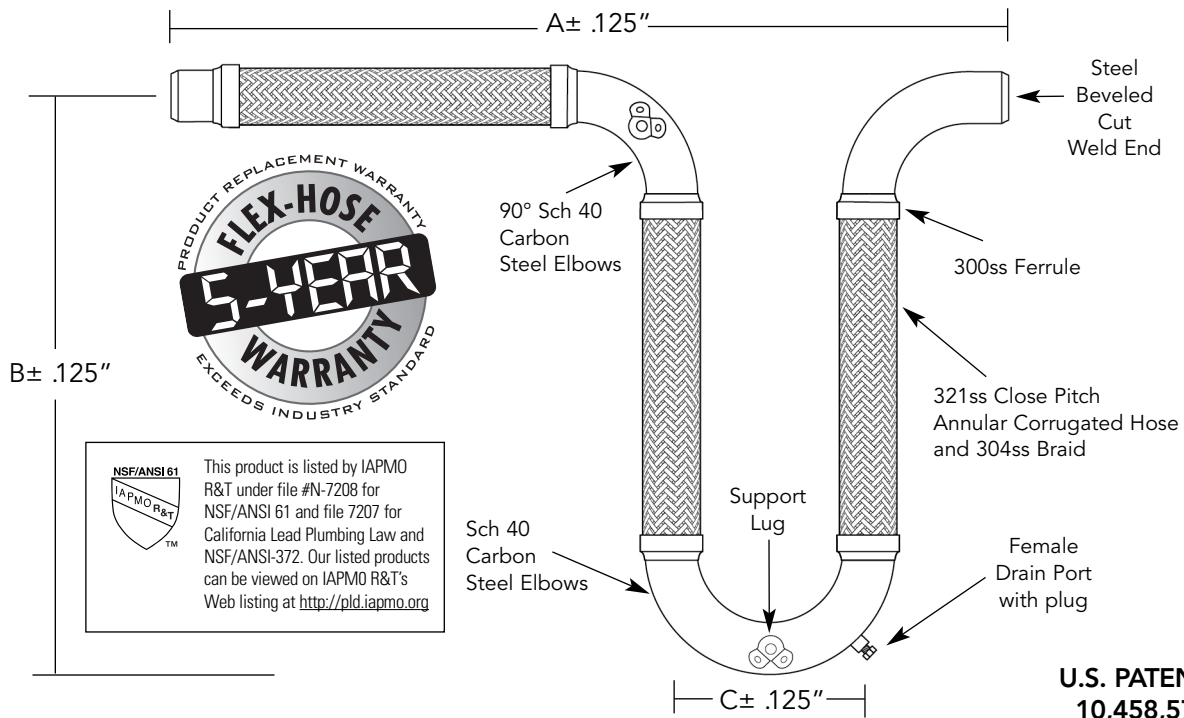

QTY.	PIPE SIZE (IN.)	DIMENSIONS (IN.)			PRESSURE (PSI)		COMPRESSION (IN.)	EXTENSION (IN.)	PARALLEL (IN.)	ROTATION "X" AXIS (DEG)	NON-PARALLEL "Y" AXIS (DEG)	DRAIN PORT (IN.)	WT. (LBS.)	NOTES
		A	B	C	70°F	200°F								
	½	31.00	18.00	9.50	1100	1034	4	4	4	35°	2	¼	2.2	
	¾	32.75	18.50	10.25	800	752	4	4	4	35°	2	¼	3.2	
	1	36.25	20.50	10.50	750	705	4	4	4	30°	2	½	5.7	
	1.25	42.38	22.50	10.75	725	681	4	4	4	25°	2	½	8.4	
	1.5	46.00	24.50	10.50	565	531	4	4	4	25°	2	½	10.3	
	2	45.75	28.25	11.75	500	470	4	4	4	20°	2	½	17.0	
	2.5	48.50	31.00	12.00	400	376	4	4	4	20°	2	¾	30.0	
	3	52.75	34.00	12.50	285	267	4	4	4	15°	2	¾	42.0	
	4	60.00	40.00	14.25	250	235	4	4	4	10°	2	¾	68.0	
	5	71.25	51.00	15.00	200	188	4	4	4	10°	2	¾	130.0	
	6	78.00	54.25	18.00	220	206	4	4	4	5°	2	¾	161.0	
	8	95.00	63.25	24.00	215	202	4	4	4	5°	2	¾	316.0	
	10	115.0	74.38	30.00	200	188	4	4	4	3°	2	¾	543.0	
	12	132.00	84.38	36.00	160	150	4	4	4	3°	2	¾	801.0	

MOVEMENT CAPABILITY: +/-4"

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
 Liverpool, New York USA 13088-2509
 315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX