


# AssureFlex® Two-Leg U Style Seismic and Expansion Loop for Fire Protection

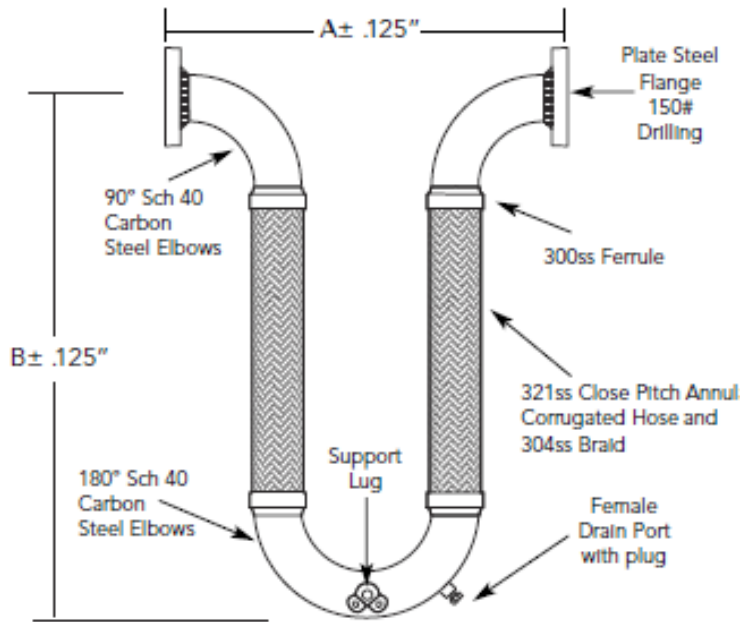

CSA standard B-51 certified.  
Inspected and tested by the  
Technical Standards and  
Safety Authority of Canada.

QTY.	I.D. (in.)	Length (in.)		Pressure (PSI) @70° F	Drain Port (in.)	Weight (lb.)	Comments
		A (in.)	B (in.)				
	2.00	14.50	25.00	300	½	24.0	
	2.50	16.00	28.00	300	¾	36.0	
	3.00	18.50	30.00	300	¾	50.0	
	4.00	24.50	35.00	175	¾	69.0	
	5.00	30.50	40.00	175	¾	101.0	
	6.00	36.50	46.00	175	¾	163.0	
	8.00	48.50	58.00	175	¾	309.0	

MOVEMENT CAPABILITY: +/- 4"

8" ID provided with two overbraids.

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road  
Liverpool, NY USA 13088-2509  
315/437-1611 • Fax 315/437-1903  
[www.flexhose.com](http://www.flexhose.com) • 1.877.TRI FLEX