


# AssureFlex™ Two-Leg U Style Seismic and Expansion Loop for Fire Protection

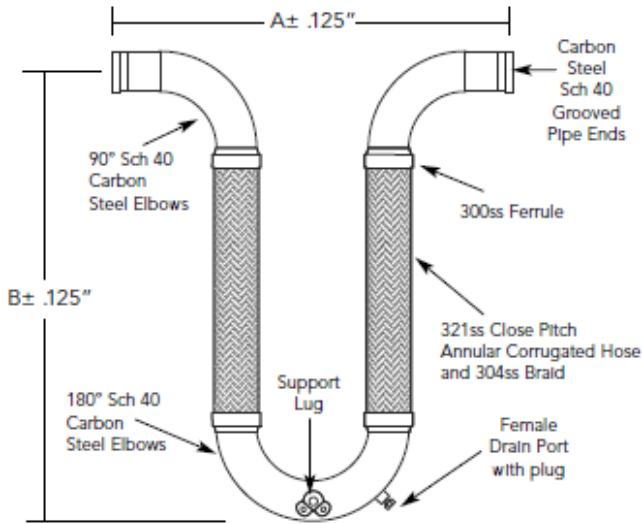

CSA standard B-51 certified.  
Inspected and tested by the  
Technical Standards and  
Safety Authority of Canada.

QTY.	I.D. (in.)	Length (in.)		Pressure (PSI) @70° F	Drain Port (in.)	Weight (lb.)	Comments
		A (in.)	B (in.)				
	4.00	30.00	39.50	300	3/4	66.0	
	5.00	36.00	40.50	300	3/4	110.0	
	6.00	42.00	49.00	300	3/4	161.0	

**MOVEMENT CAPABILITY:** +/- 4"

Provided with two braids.

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road  
Liverpool, NY USA 13088-2509  
315/437-1611 • Fax 315/437-1903  
[www.flexhose.com](http://www.flexhose.com) • 1.877.TRI FLEX