


# AssureFlex® Two-Leg U Style Seismic and Expansion Loop for Fire Protection

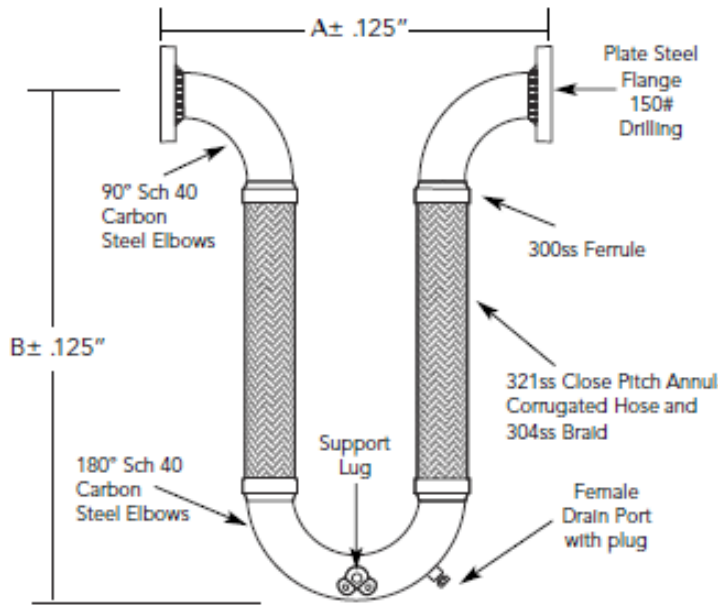

CSA standard B-51 certified.  
Inspected and tested by the  
Technical Standards and  
Safety Authority of Canada.

QTY.	I.D. (in.)	Length (in.)		Pressure (PSI) @70° F	Drain Port (in.)	Weight (lb.)	Comments
		A (in.)	B (in.)				
	2.00	17.50	30.00	300	½	19.0	
	2.50	19.50	34.00	300	¾	31.0	
	3.00	21.50	37.00	300	¾	45.0	
	4.00	26.00	43.00	175	¾	64.0	
	5.00	30.50	48.00	175	¾	105.0	
	6.00	36.50	55.00	175	¾	160.0	
	8.00	48.50	70.00	175	¾	297.0	
	10.00	60.50	74.50	175	¾	485.0	
	12.00	72.50	84.50	175	¾	675.0	

MOVEMENT CAPABILITY: +/- 8"

8" - 12" ID provided with two stainless steel over braids.

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road  
Liverpool, NY USA 13088-2509  
315/437-1611 • Fax 315/437-1903  
[www.flexhose.com](http://www.flexhose.com) • 1.877.TRI FLEX