


AssureFlex™ Two-Leg U Style Seismic and Expansion Loop for Fire Protection



UL US
LISTED
EX28995
(Flexible Joint Fitting)

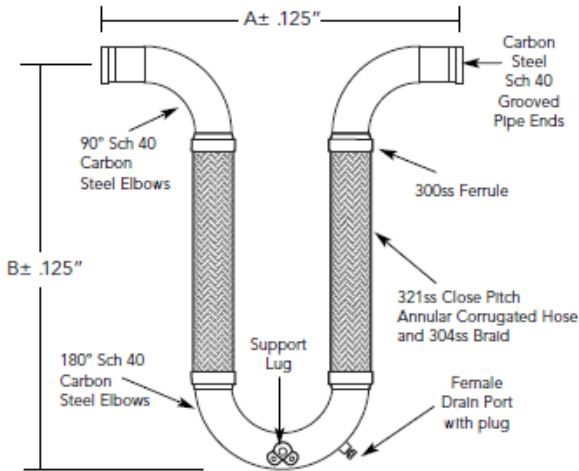

CSA standard B-51 certified.
Inspected and tested by the
Technical Standards and
Safety Authority of Canada.

| QTY. | I.D. (in.) | Length (in.) | | Pressure (PSI) @70° F | Drain Port (in.) | Weight (lb.) | Comments |
|------|---------------|--------------|------------|-----------------------------|---------------------|-----------------|----------|
| | | A (in.) | B (in.) | | | | |
| | 4.00 | 31.50 | 49.00 | 300 | ¾ | 75.0 | |
| | 5.00 | 36.00 | 49.50 | 300 | ¾ | 125.0 | |
| | 6.00 | 42.00 | 59.50 | 300 | ¾ | 178.0 | |

MOVEMENT CAPABILITY: +/- 8"

Provided with two braids.

| | |
|----------------|--|
| PROJECT | |
| CUSTOMER | |
| ENGINEER | |
| REPRESENTATIVE | |
| DRAWING # | |



4560 Buckley Road
Liverpool, NY USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX