
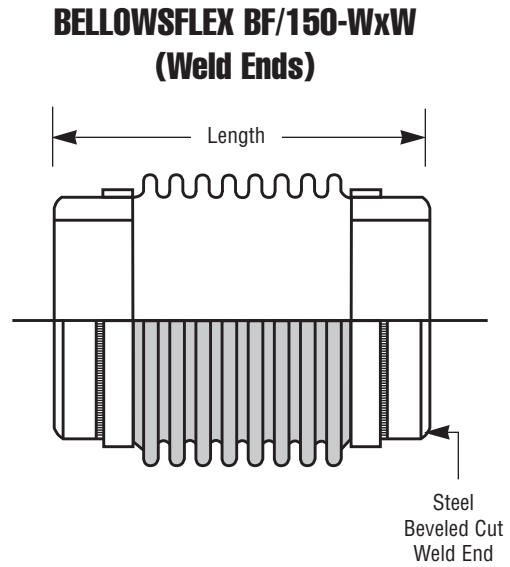


BELLOWSFLEX Metal Bellows Type Expansion Joints

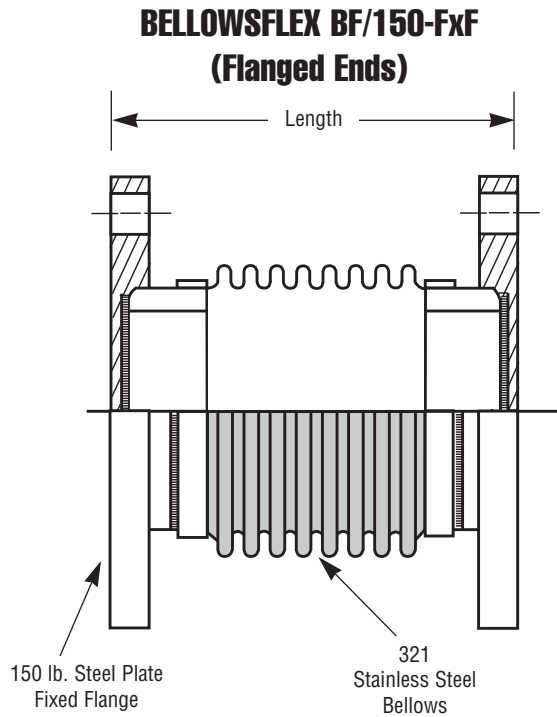

Design Pressure 150 PSIG Test Pressure 225 PSIG Max. Temperature 650°F

QTY	I.D. (in.)	Length (in.)		MOVEMENT CAPABILITY			Wt. (lbs)		NOTES
		FxF	WxW	Compression (in.)	Extension (in.)	Parallel (in.)	FxF	WxW	
	2.00	8.50	8.00	$\frac{13}{16}$	$\frac{3}{8}$	$\frac{7}{16}$	14.00	6.00	
	2.50	9.00	8.50	$\frac{15}{16}$	$\frac{7}{16}$	$\frac{1}{2}$	17.00	6.00	
	3.00	9.00	8.50	1.00	$\frac{1}{2}$	$\frac{3}{16}$	22.00	9.00	
	4.00	10.50	10.00	1.00	$\frac{1}{2}$	$\frac{1}{4}$	34.00	18.00	
	5.00	12.50	12.00	$1\frac{13}{16}$	$\frac{7}{8}$	$\frac{1}{4}$	54.00	23.00	
	6.00	13.00	12.50	2.00	1.00	$\frac{3}{8}$	57.00	34.00	
	8.00	14.00	13.50	2.00	1.00	$\frac{5}{16}$	88.00	43.00	
	10.00	14.50	14.00	2.00	1.00	$\frac{3}{8}$	124.00	70.00	
	12.00	15.50	15.00	2.00	1.00	$\frac{3}{8}$	201.00	119.00	

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
 Liverpool, NY USA 13088-2509
 Phone 315/437.1611 • Fax 315/437.1903
 www.flexhose.com • 1.877.METAL EJ

Rev. 09/23

METAL BELLOWS EXPANSION JOINTS

BF/150 FxF & BF/150 WxW 2"-12" I.D.