


FLEXCOMP HP/STL-MxM Expansion Compensators

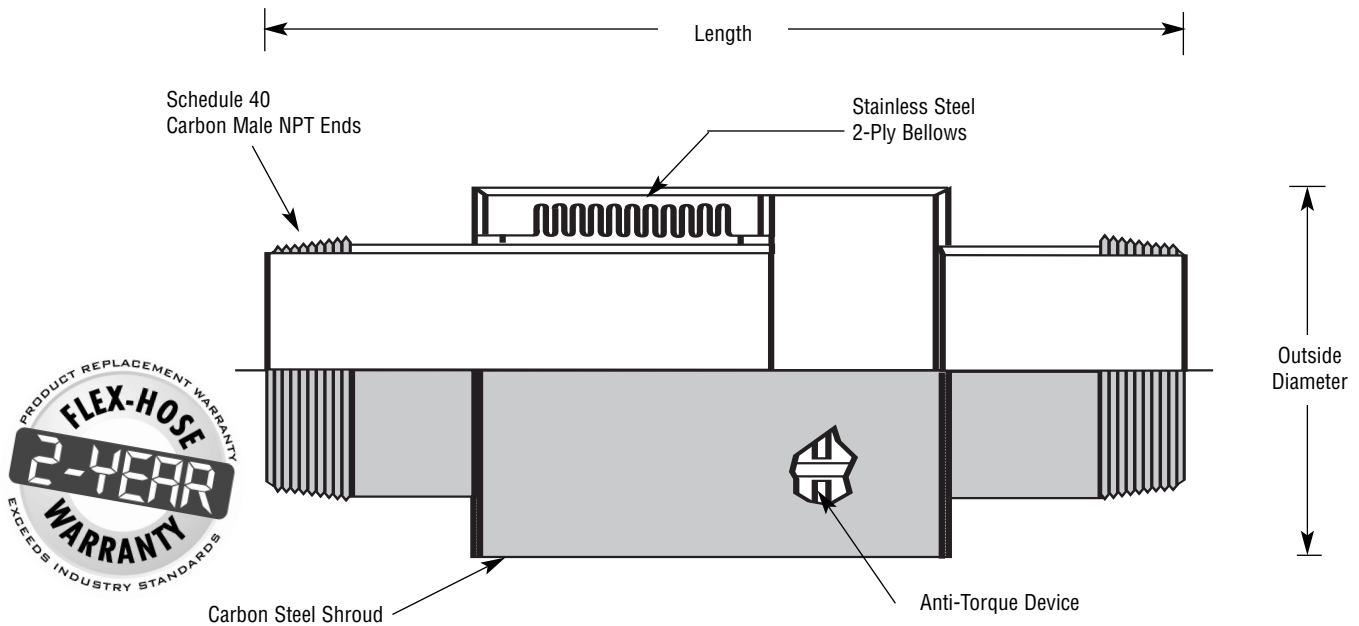

RATED FOR: 10,000 CYCLES @ 1/2 TRAVEL

NOTE: FOR PROPER OPERATION, ALL PIPING MUST BE PROPERLY ANCHORED AND GUIDED.

QTY	I.D. (In.)	Length (In.)	Outside Diameter	Max Pressure (PSI)		Movement Capability		Wt. (Lbs.)	NOTES
				Working	Test	Compression (In.)	Extension (In.)		
	.75	12½	3	150	225	1¾	¼	5.5	
	1.00	12½	3½	150	225	1¾	¼	7.0	
	1.25	14½	4	150	225	1¾	¼	10.2	
	1.50	14½	4½	150	225	1¾	¼	12.3	
	2.00	14½	4½	150	225	1¾	¼	13.2	
	2.50	15½	5½	150	225	1¾	¼	19.6	
	3.00	15¾	6½	150	225	1¾	¼	24.4	
	4.00	15¾	7¾	150	225	1¾	¼	27.5	



CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.

This product is produced with stainless steel bellows. Stainless steel components should not be used in systems containing excessive chlorides. Premature failure may result.

MAXIMUM SERVICE TEMPERATURE IS 750°F

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
 Liverpool, NY USA 13088-2509
 315/437-1611 • Fax 315/437-1903
 www.flexhose.com • 1.877.TRI FLEX

REV. 9/23-C