


Try-Flex Loop® Expansion Loops & Seismic Connectors

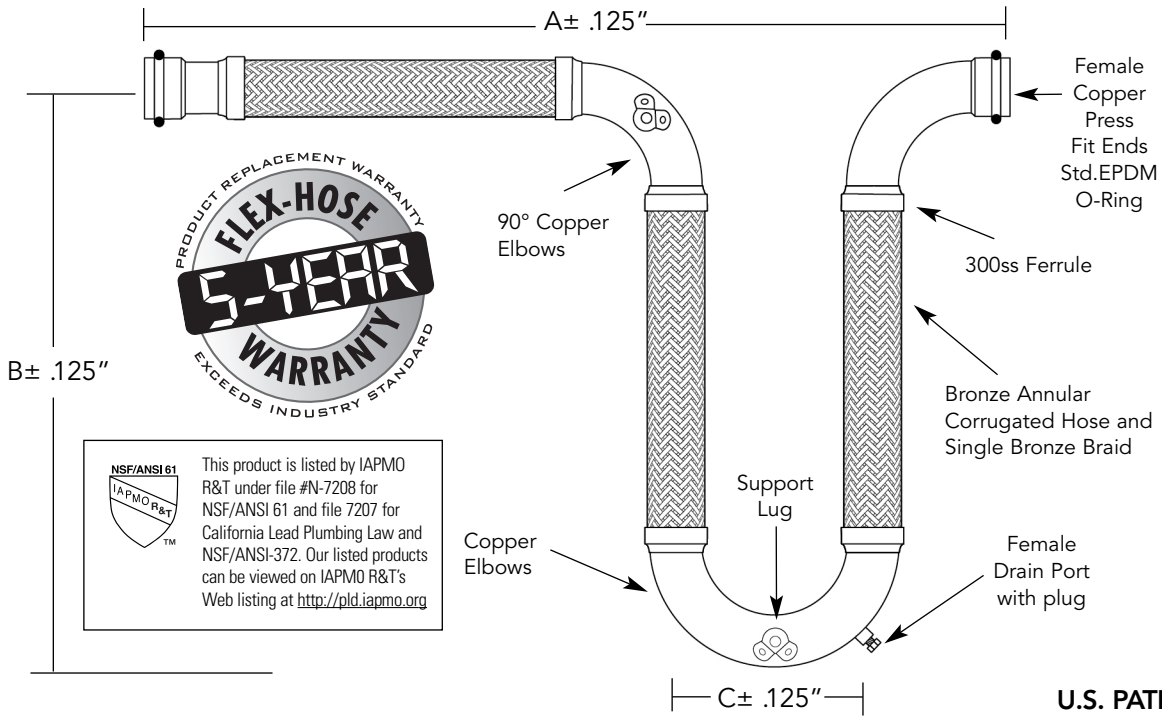

U.S. PATENT NO.
10,458,575 B2

QTY.	PIPE SIZE (IN.)	DIMENSIONS (IN.)			PRESSURE (PSI) 250°F	COMPRESSION (IN.)	EXTENSION (IN.)	PARALLEL (IN.)	ROTATION "X" AXIS (DEG)	NON-PARALLEL "Y" AXIS (DEG)	DRAIN PORT (IN.)	WT. (LBS.)	NOTES
		A	B	C									
	½	22.00	14.13	6.00	200	2	2	2	25°	1	¼	1.9	
	¾	25.00	16.50	6.50	200	2	2	2	20°	1	¼	3.2	
	1	26.88	18.63	6.25	200	2	2	2	20°	1	½	4.6	
	1.25	28.88	20.50	6.50	200	2	2	2	15°	1	½	7.2	
	1.5	33.25	23.75	6.75	200	2	2	2	15°	1	½	13.0	
	2	39.63	27.75	7.50	180	2	2	2	10°	1	½	15.0	

*Working pressures based on maximum fitting capability at 250°F.

MOVEMENT CAPABILITY: +/-2"

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
Liverpool, New York USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX