
Try-Flex Loop® Expansion Loops & Seismic Connectors



QTY.	PIPE SIZE (IN.)	DIN A	/IENSION (IN.) B	vs c	PRES: (PS 70°F	SURE SI) 200°F	COMPRESSION (IN.)	EXTENSION (IN.)	PARALLEL (IN.)	ROTATION "X" AXIS (DEG)	NON-PARALLEL "Y" AXIS (DEG)	DRAIN PORT (IN.)	WT. (LBS.)	NOTES
	1/2	20.13	13.50	6.00	565	502	2	2	2	25°	1	1/4	1.7	
	3/4	23.50	16.00	6.50	465	413	2	2	2	20°	1	1/4	3.0	
	1	25.50	18.00	6.25	335	298	2	2	2	20°	1	1/2	4.1	
	1.25	27.75	20.00	6.50	300	267	2	2	2	15°	1	1/2	7.0	
	1.5	31.25	23.00	6.75	295	262	2	2	2	15°	1	1/2	11.0	
	2	34.75	25.50	7.50	210	186	2	2	2	10°	1	1/2	14.0	
	2.5	36.25	26.00	8.75	195	173	2	2	2	10°	1	3/4	22.0	
	3	39.50	28.75	9.13	165	146	2	2	2	5°	1	3/4	32.0	

MOVEMENT CAPABILITY: +/-2"

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	

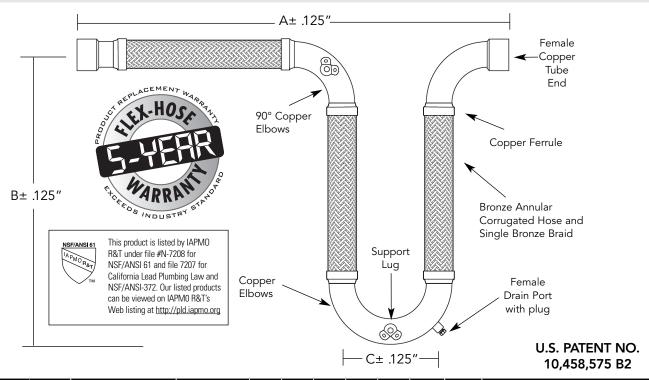

4560 Buckley Road Liverpool, New York USA 13088-2509 315/437-1611 • Fax 315/437-1903

www.flexhose.com • 1.877.TRI FLEX