


Try-Flex Loop® Expansion Loops & Seismic Connectors

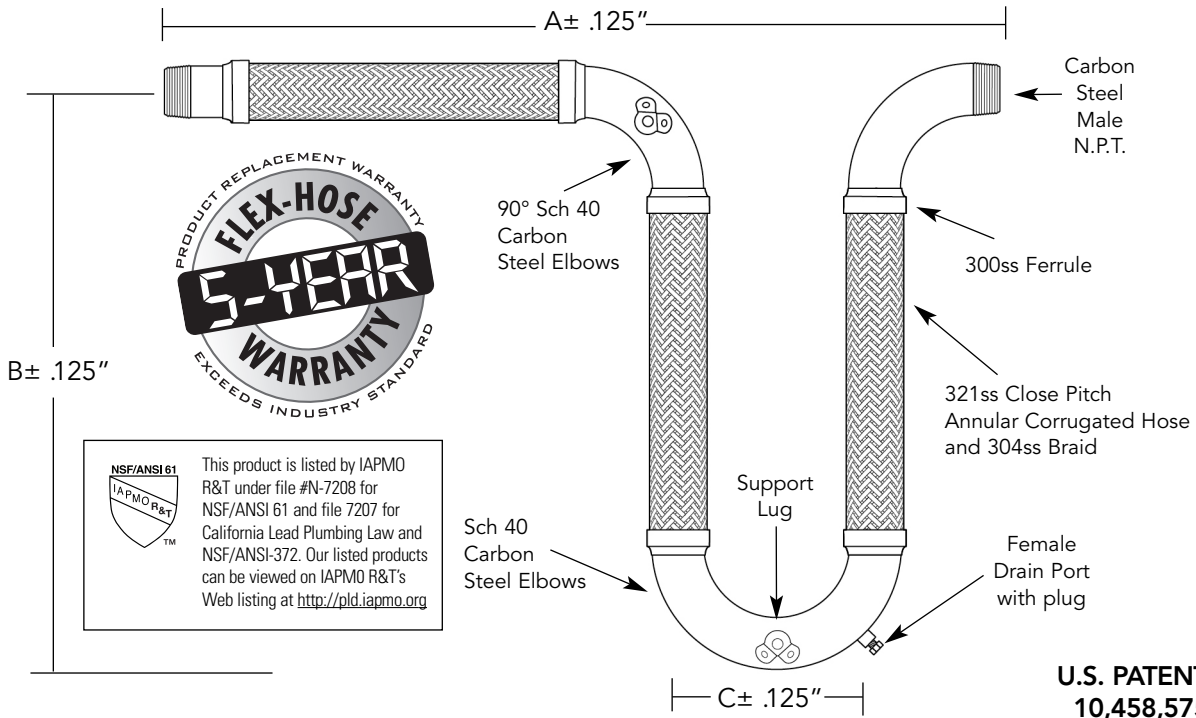

**U.S. PATENT NO.
10,458,575 B2**

QTY.	PIPE SIZE (IN.)	DIMENSIONS (IN.)			PRESSURE (PSI)		COMPRESSION (IN.)	EXTENSION (IN.)	PARALLEL (IN.)	ROTATION "X" AXIS (DEG)	NON-PARALLEL "Y" AXIS (DEG)	DRAIN PORT (IN.)	WT. (LBS.)	NOTES
		A	B	C	70°F	200°F								
	½	22.00	14.00	5.50	1100	1034	2	2	2	25°	1	¼	1.9	
	¾	23.25	14.50	6.25	800	752	2	2	2	20°	1	¼	2.6	
	1	24.50	15.75	6.50	750	705	2	2	2	20°	1	½	4.4	
	1.25	30.00	18.00	6.75	725	681	2	2	2	15°	1	½	6.4	
	1.5	29.00	19.50	6.50	565	531	2	2	2	15°	1	½	7.8	
	2	32.75	22.25	7.75	500	470	2	2	2	10°	1	½	14.0	
	2.5	36.25	25.00	8.75	400	376	2	2	2	10°	1	¾	25.0	
	3	39.25	28.00	9.00	285	267	2	2	2	10°	1	¾	35.0	
	4	46.75	33.00	12.00	250	235	2	2	2	5°	1	¾	59.0	

MOVEMENT CAPABILITY: +/-2"

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
 Liverpool, New York USA 13088-2509
 315/437-1611 • Fax 315/437-1903
 www.flexhose.com • 1.877.TRI FLEX

FHTRYL2SMN ½"-4" I.D.