


# Try-Flex Loop® Expansion Loops & Seismic Connectors

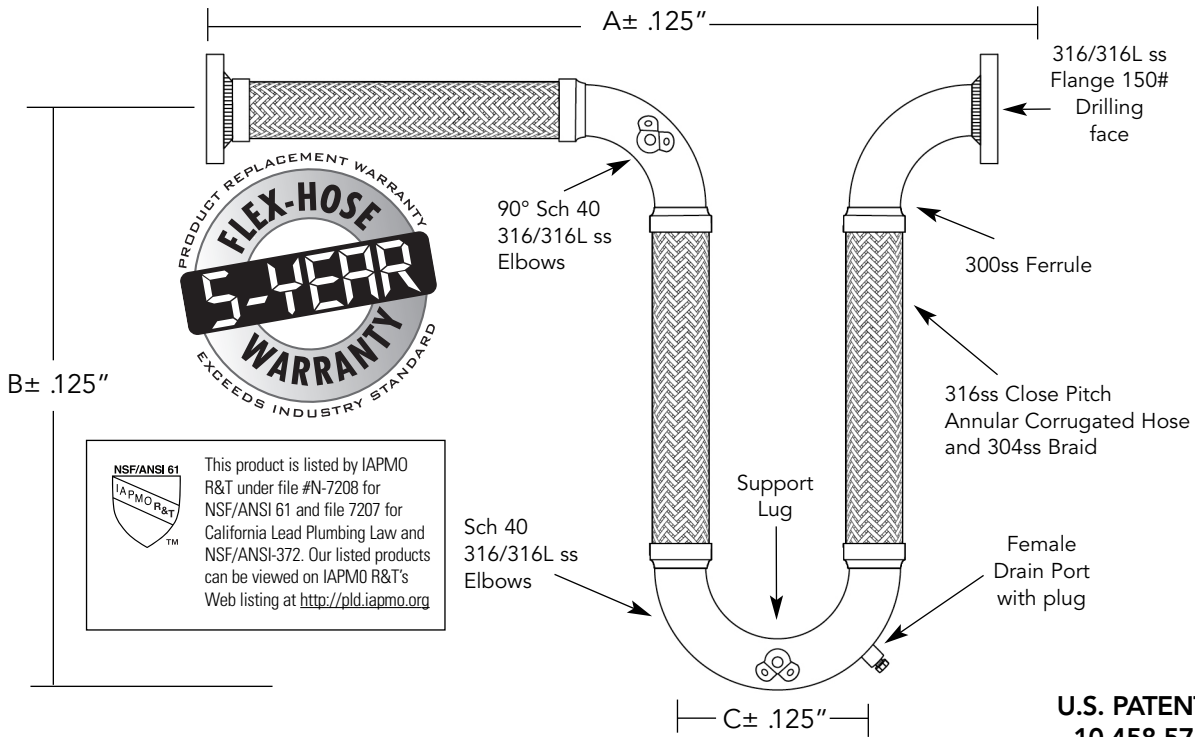

**U.S. PATENT NO.  
10,458,575 B2**

Qty	Pipe Size (in.)	Dimensions (in.)			Pressure (PSI)		Movement Capability					Drain Port (in.)	Wt. (lb.)	Notes
		A	B	C	@ 70° F	@ 200° F	Compression (in.)	Extension (in.)	Parallel (in.)	Rotation "X" Axis (Deg.)	Non-Parallel "Y" Axis (in.)			
	1.00	23.75	15.75	6.50	750	690	2.0	2.0	2.0	20°	1.0	¼	8.6	
	1.25	26.75	18.00	6.75	725	667	2.0	2.0	2.0	15°	1.0	½	11	
	1.50	27.88	19.50	6.50	565	519	2.0	2.0	2.0	15°	1.0	½	13	
	2.00	31.63	22.25	7.75	500	460	2.0	2.0	2.0	10°	1.0	½	22	
	2.50	35.13	25.00	8.75	400	368	2.0	2.0	2.0	10°	1.0	¾	36	
	3.00	38.13	28.00	9.00	285	262	2.0	2.0	2.0	10°	1.0	¾	47	
	4.00	43.63	33.00	12.00	250	230	2.0	2.0	2.0	5°	1.0	¾	72	
	5.00	54.50	41.25	15.00	200	184	2.0	2.0	2.0	5°	1.0	¾	120	
	6.00	60.63	45.00	18.00	220	202	2.0	2.0	2.0	3°	1.0	¾	158	
	8.00	74.25	53.25	24.00	200	184	2.0	2.0	2.0	ON APPLICATION	1.0	¾	310	
	10.00	89.25	68.38	30.00	200	184	2.0	2.0	2.0	ON APPLICATION	1.0	¾	506	
	12.00	103.25	72.38	36.00	160	147	2.0	2.0	2.0	ON APPLICATION	1.0	¾	748	

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road  
 Liverpool, New York USA 13088-2509  
 315/437-1611 • Fax 315/437-1903  
 www.flexhose.com • 1.877.TRI FLEX