


Try-Flex Loop® Expansion Loops & Seismic Connectors

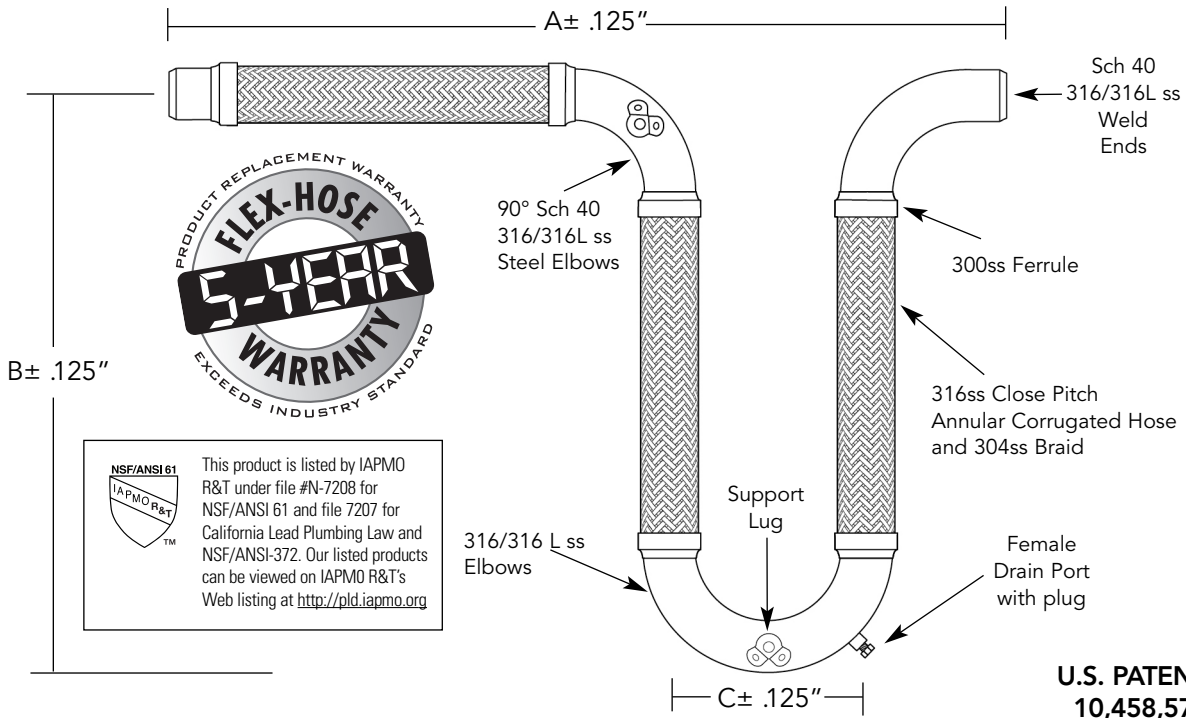

**U.S. PATENT NO.
10,458,575 B2**

Qty	Pipe Size (in.)	Dimensions (in.)			Pressure (PSI)		Movement Capability					Drain Port (in.)	Wt. (lb.)	Notes
		A	B	C	@ 70° F	@ 200° F	Compression (in.)	Extension (in.)	Parallel (in.)	Rotation "X" Axis (Deg.)	Non-Parallel "Y" Axis (in.)			
	½	23.50	14.00	5.50	1100	1012	2.0	2.0	2.0	25°	1.0	¼	2.0	
	¾	24.75	14.50	6.25	800	736	2.0	2.0	2.0	20°	1.0	¼	2.8	
	1.00	27.50	15.75	6.50	750	690	2.0	2.0	2.0	20°	1.0	½	4.9	
	1.25	34.00	18.00	6.75	725	667	2.0	2.0	2.0	15°	1.0	½	7.6	
	1.50	37.00	19.50	6.50	565	519	2.0	2.0	2.0	15°	1.0	½	9.7	
	2.00	35.75	22.25	7.75	500	460	2.0	2.0	2.0	10°	1.0	½	15	
	2.50	39.25	25.00	8.75	400	368	2.0	2.0	2.0	10°	1.0	¾	27	
	3.00	45.25	28.00	9.00	285	262	2.0	2.0	2.0	10°	1.0	¾	38	
	4.00	50.75	33.00	12.00	250	230	2.0	2.0	2.0	5°	1.0	¾	63	
	5.00	61.50	41.25	15.00	200	184	2.0	2.0	2.0	5°	1.0	¾	109	
	6.00	68.63	45.00	18.00	220	202	2.0	2.0	2.0	3°	1.0	¾	149	
	8.00	85.00	53.25	24.00	200	184	2.0	2.0	2.0	ON APPLICATION	1.0	¾	293	
	10.00	104.00	68.38	30.00	200	184	2.0	2.0	2.0	ON APPLICATION	1.0	¾	507	
	12.00	120.00	72.38	36.00	160	147	2.0	2.0	2.0	ON APPLICATION	1.0	¾	746	

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
 Liverpool, New York USA 13088-2509
 315/437-1611 • Fax 315/437-1903
 www.flexhose.com • 1.877.TRI FLEX