


Try-Flex Loop® Expansion Loops & Seismic Connectors

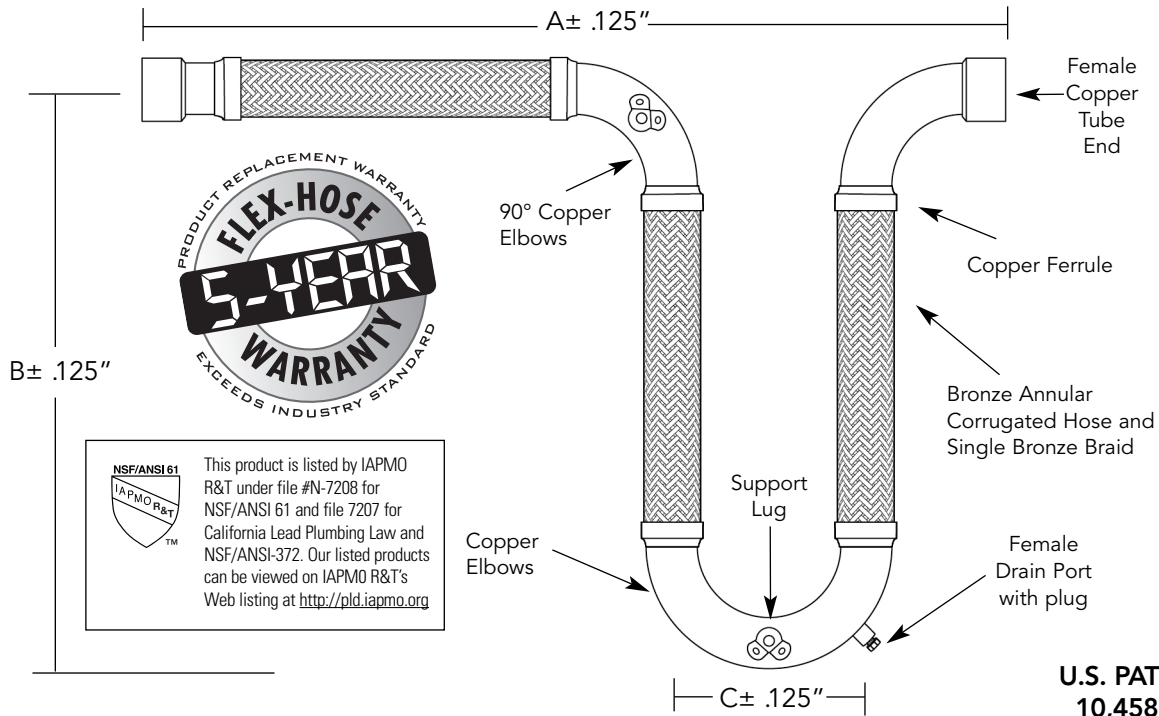

U.S. PATENT NO.
10,458,575 B2

QTY.	PIPE SIZE (IN.)	DIMENSIONS (IN.)			PRESSURE (PSI)		COMPRESSION (IN.)	EXTENSION (IN.)	PARALLEL (IN.)	ROTATION "X" AXIS (DEG)	NON-PARALLEL "Y" AXIS (DEG)	DRAIN PORT (IN.)	WT. (LBS.)	NOTES
		A	B	C	70°F	200°F								
	½	28.38	17.75	10.00	565	502	4	4	4	35°	2	¼	2.2	
	¾	31.50	20.50	10.00	465	413	4	4	4	30°	2	¼	3.8	
	1	34.25	22.75	10.25	335	298	4	4	4	30°	2	½	5.3	
	1.25	37.00	25.25	10.50	300	267	4	4	4	25°	2	½	8.9	
	1.5	40.63	28.50	10.75	295	262	4	4	4	25°	2	½	13.0	
	2	44.75	31.50	11.50	210	186	4	4	4	20°	2	½	18.0	
	2.5	46.25	32.00	12.75	195	173	4	4	4	20°	2	¾	28.0	
	3	50.25	35.50	13.13	165	146	4	4	4	15°	2	¾	38.0	

MOVEMENT CAPABILITY: +/-4"

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
Liverpool, New York USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX

Expansion Loops & Seismic Connectors

FHTRYL4BSW ½"-4" I.D.