


Try-Flex Loop® Expansion Loops & Seismic Connectors



Qty	Pipe Size (in.)	Dimensions (in.)			Pressure (PSI)		Movement Capability					Drain Port (in.)	Wt. (lb.)	Notes
		A	B	C	@ 70° F	@ 200° F	Compression (in.)	Extension (in.)	Parallel (in.)	Rotation "X" Axis (Deg.)	Non-Parallel "Y" Axis (in.)			
	1.00	32.50	20.50	10.50	750	705	4.00	4.00	4.00	30°	2.00	¼	9.4	
	1.25	35.13	22.50	10.75	725	681	4.00	4.00	4.00	25°	2.00	½	12	
	1.50	36.88	24.50	10.50	565	531	4.00	4.00	4.00	25°	2.00	½	14	
	2.00	41.63	28.25	11.75	500	470	4.00	4.00	4.00	20°	2.00	½	24	
	2.50	44.38	31.00	12.00	400	376	4.00	4.00	4.00	20°	2.00	¾	39	
	3.00	47.63	34.00	12.50	285	267	4.00	4.00	4.00	15°	2.00	¾	51	
	4.00	52.88	40.00	14.25	250	235	4.00	4.00	4.00	10°	2.00	¾	77	
	5.00	64.25	51.00	15.00	200	188	4.00	4.00	4.00	10°	2.00	¾	142	
	6.00	70.00	54.25	18.00	220	206	4.00	4.00	4.00	5°	2.00	¾	170	
	8.00	84.25	63.25	24.00	200	188	4.00	4.00	4.00	5°	2.00	¾	333	
	10.00	100.25	74.38	30.00	200	188	4.00	4.00	4.00	3°	2.00	¾	542	
	12.00	115.25	84.38	36.00	160	150	4.00	4.00	4.00	3°	2.00	¾	803	

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	

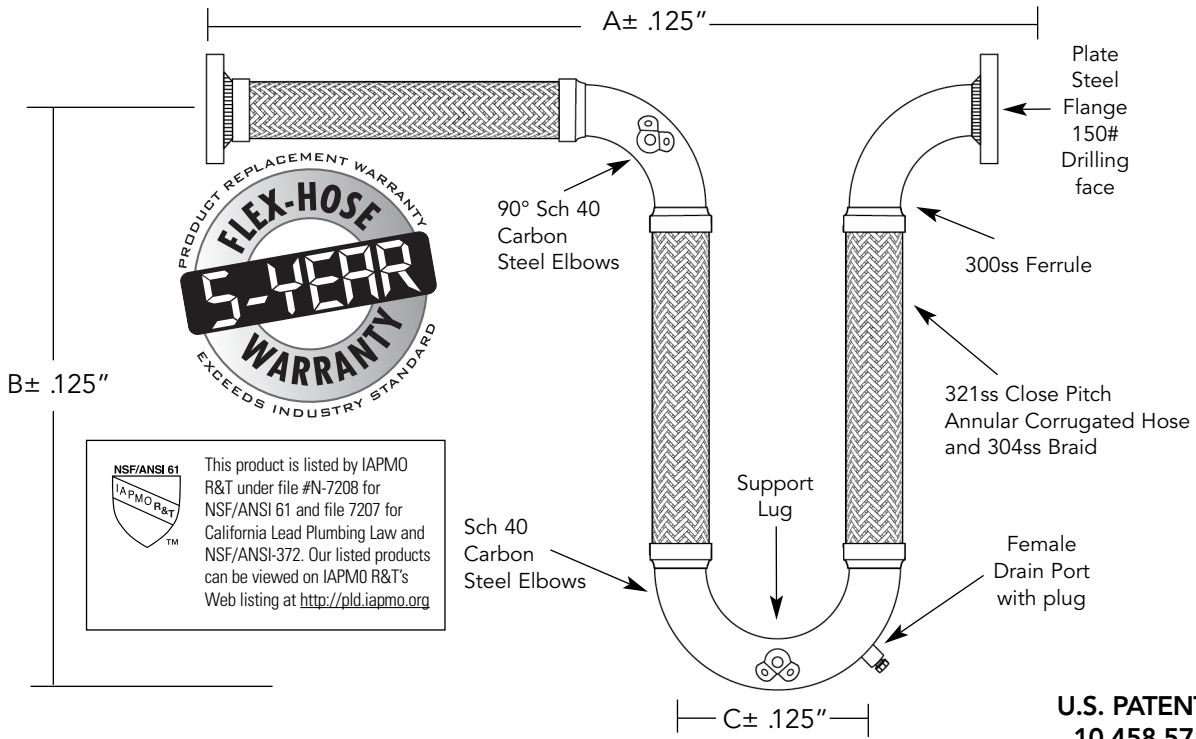

4560 Buckley Road
 Liverpool, New York USA 13088-2509
 315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX