


Try-Flex Loop® Expansion Loops & Seismic Connectors

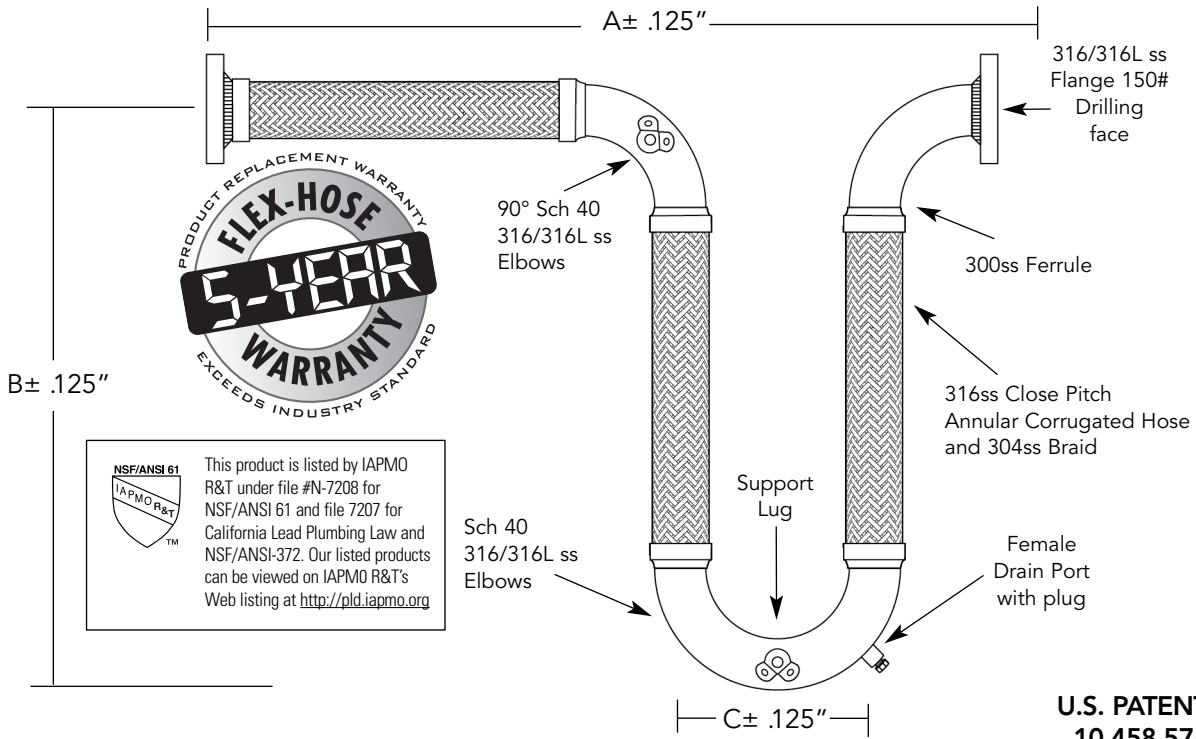

**U.S. PATENT NO.
10,458,575 B2**

| Qty | Pipe Size (in.) | Dimensions (in.) | | | Pressure (PSI) | | Movement Capability | | | | | Drain Port (in.) | Wt. (lb.) | Notes |
|-----|-----------------|------------------|-------|-------|----------------|----------|---------------------|-----------------|----------------|--------------------------|-----------------------------|------------------|-----------|-------|
| | | A | B | C | @ 70° F | @ 200° F | Compression (in.) | Extension (in.) | Parallel (in.) | Rotation "X" Axis (Deg.) | Non-Parallel "Y" Axis (in.) | | | |
| | 1.00 | 32.50 | 20.50 | 10.50 | 750 | 690 | 4.00 | 4.00 | 4.00 | 30° | 2.00 | ¼ | 9.4 | |
| | 1.25 | 35.13 | 22.50 | 10.75 | 725 | 667 | 4.00 | 4.00 | 4.00 | 25° | 2.00 | ½ | 12 | |
| | 1.50 | 36.88 | 24.50 | 10.50 | 565 | 519 | 4.00 | 4.00 | 4.00 | 25° | 2.00 | ½ | 14 | |
| | 2.00 | 41.63 | 28.25 | 11.75 | 500 | 460 | 4.00 | 4.00 | 4.00 | 20° | 2.00 | ½ | 24 | |
| | 2.50 | 44.38 | 31.00 | 12.00 | 400 | 368 | 4.00 | 4.00 | 4.00 | 20° | 2.00 | ¾ | 39 | |
| | 3.00 | 47.63 | 34.00 | 12.50 | 285 | 262 | 4.00 | 4.00 | 4.00 | 15° | 2.00 | ¾ | 51 | |
| | 4.00 | 52.88 | 40.00 | 14.25 | 250 | 230 | 4.00 | 4.00 | 4.00 | 10° | 2.00 | ¾ | 77 | |
| | 5.00 | 64.25 | 51.00 | 15.00 | 200 | 184 | 4.00 | 4.00 | 4.00 | 10° | 2.00 | ¾ | 142 | |
| | 6.00 | 70.00 | 54.25 | 18.00 | 220 | 202 | 4.00 | 4.00 | 4.00 | 5° | 2.00 | ¾ | 170 | |
| | 8.00 | 84.25 | 63.25 | 24.00 | 200 | 184 | 4.00 | 4.00 | 4.00 | 5° | 2.00 | ¾ | 333 | |
| | 10.00 | 100.25 | 74.38 | 30.00 | 200 | 184 | 4.00 | 4.00 | 4.00 | 3° | 2.00 | ¾ | 542 | |
| | 12.00 | 115.25 | 84.38 | 36.00 | 160 | 147 | 4.00 | 4.00 | 4.00 | 3° | 2.00 | ¾ | 803 | |

| | |
|----------------|--|
| PROJECT | |
| CUSTOMER | |
| ENGINEER | |
| REPRESENTATIVE | |
| DRAWING # | |



4560 Buckley Road
 Liverpool, New York USA 13088-2509
 315/437-1611 • Fax 315/437-1903
 www.flexhose.com • 1.877.TRI FLEX