


# Try-Flex Loop® Expansion Loops & Seismic Connectors



Qty	Pipe Size (in.)	Dimensions (in.)			Pressure (PSI)		Movement Capability					Drain Port (in.)	Wt. (lb.)	Notes
		A	B	C	@ 70° F	@ 200° F	Compression (in.)	Extension (in.)	Parallel (in.)	Rotation "X" Axis (Deg.)	Non-Parallel "Y" Axis (in.)			
	1.25	36.38	22.50	10.75	725	681	4.0	4.0	4.0	25°	2.0	½	7.3	
	1.50	38.00	24.50	10.50	565	531	4.0	4.0	4.0	25°	2.0	½	8.9	
	2.00	42.75	28.25	11.75	500	470	4.0	4.0	4.0	20°	2.0	½	17	
	2.50	45.50	31.00	12.00	400	376	4.0	4.0	4.0	20°	2.0	¾	29	
	3.00	48.75	34.00	12.50	285	267	4.0	4.0	4.0	15°	2.0	¾	39	
	4.00	58.00	40.00	14.25	250	235	4.0	4.0	4.0	10°	2.0	¾	66	
	5.00	71.25	51.00	15.00	200	188	4.0	4.0	4.0	10°	2.0	¾	130	
	6.00	78.00	54.25	18.00	220	206	4.0	4.0	4.0	5°	2.0	¾	161	
	8.00	92.00	63.25	24.00	200	188	4.0	4.0	4.0	5°	2.0	¾	309	
	10.00	110.00	74.38	30.00	200	188	4.0	4.0	4.0	3°	2.0	¾	526	
	12.00	125.00	84.38	36.00	160	150	4.0	4.0	4.0	3°	2.0	¾	769	

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	

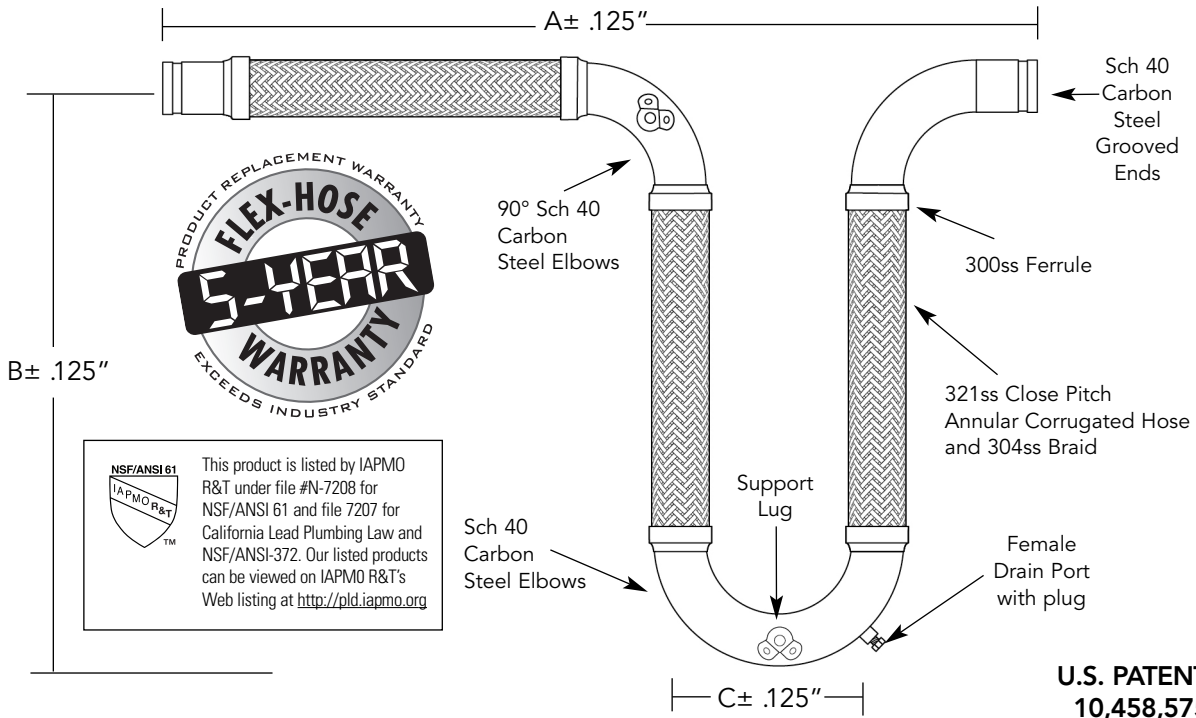

4560 Buckley Road  
 Liverpool, New York USA 13088-2509  
 315/437-1611 • Fax 315/437-1903  
[www.flexhose.com](http://www.flexhose.com) • 1.877.TRI FLEX