


# AssureFlex® Two-Leg U Style Seismic and Expansion Loop for Fire Protection

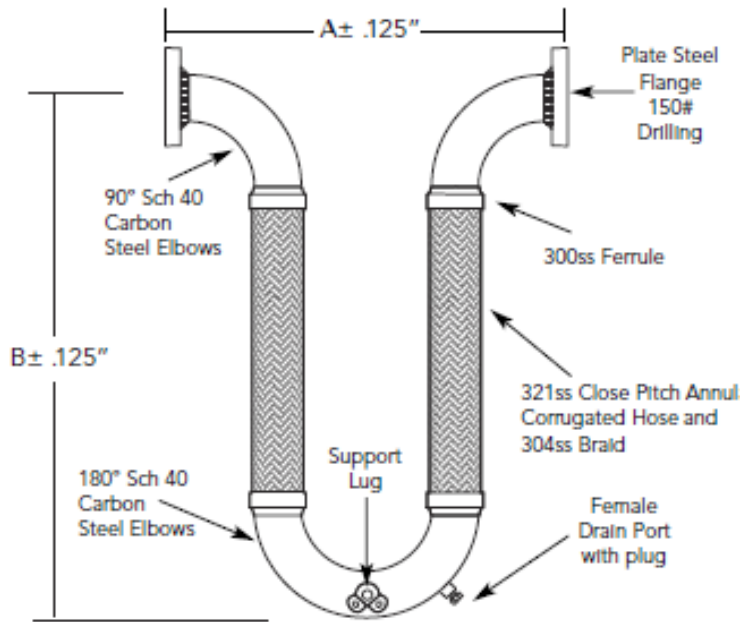

CSA standard B-51 certified.  
Inspected and tested by the  
Technical Standards and  
Safety Authority of Canada.

QTY.	I.D. (in.)	Length (in.)		Pressure (PSI) @70° F	Drain Port (in.)	Weight (lb.)	Comments
		A (in.)	B (in.)				
	2.00	25.50	39.00	300	½	28.0	
	2.50	27.50	45.00	300	¾	45.0	
	3.00	29.50	48.00	300	¾	57.0	
	4.00	34.50	56.00	175	¾	90.0	
	5.00	38.50	62.00	175	¾	132.0	
	6.00	42.50	68.00	175	¾	191.0	
	8.00	50.50	78.00	175	¾	363.0	
	10.00	60.50	90.00	175	¾	575.0	
	12.00	72.50	102.00	175	¾	858.0	

MOVEMENT CAPABILITY: +/- 16"

8" -12" ID provided with two braids.

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road  
Liverpool, NY USA 13088-2509  
315/437-1611 • Fax 315/437-1903  
[www.flexhose.com](http://www.flexhose.com) • 1.877.TRI FLEX

Rev. 12/23