


# AssureFlex™ Two-Leg U Style Seismic and Expansion Loop for Fire Protection

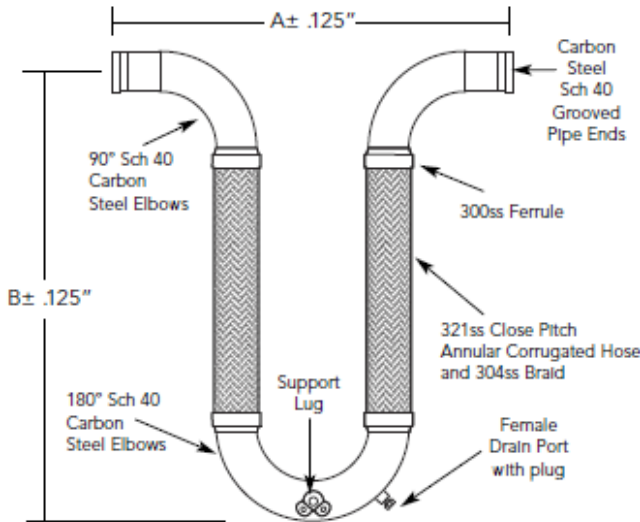

CSA standard B-51 certified.  
Inspected and tested by the  
Technical Standards and  
Safety Authority of Canada.

QTY.	I.D. (in.)	Length (in.)		Pressure (PSI) @70° F	Drain Port (in.)	Weight (lb.)	Comments
		A (in.)	B (in.)				
	1.00	15.00	20.00	300	½	6.0	
	1.25	15.75	21.00	300	½	7.5	
	1.50	17.50	23.00	300	½	9.0	
	2.00	20.00	25.00	300	½	15.0	
	2.50	21.50	28.00	300	¾	25.0	
	3.00	24.00	30.00	300	¾	34.0	
	4.00	30.00	35.00	175	¾	58.0	
	5.00	36.00	40.00	175	¾	90.0	
	6.00	42.00	46.00	175	¾	141.0	
	8.00	56.00	58.00	175	¾	288.0	
	10.00	68.00	64.00	175	¾	467.0	
	12.00	80.00	73.00	175	¾	686.0	

MOVEMENT CAPABILITY: +/- 4"

8" - 12" ID provided with two stainless steel over braids.

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road  
Liverpool, NY USA 13088-2509  
315/437-1611 • Fax 315/437-1903  
[www.flexhose.com](http://www.flexhose.com) • 1.877.TRI FLEX