


AssureFlex® Tri-Flex Loop® Expansion Loops & Seismic Connectors For Fire Protection

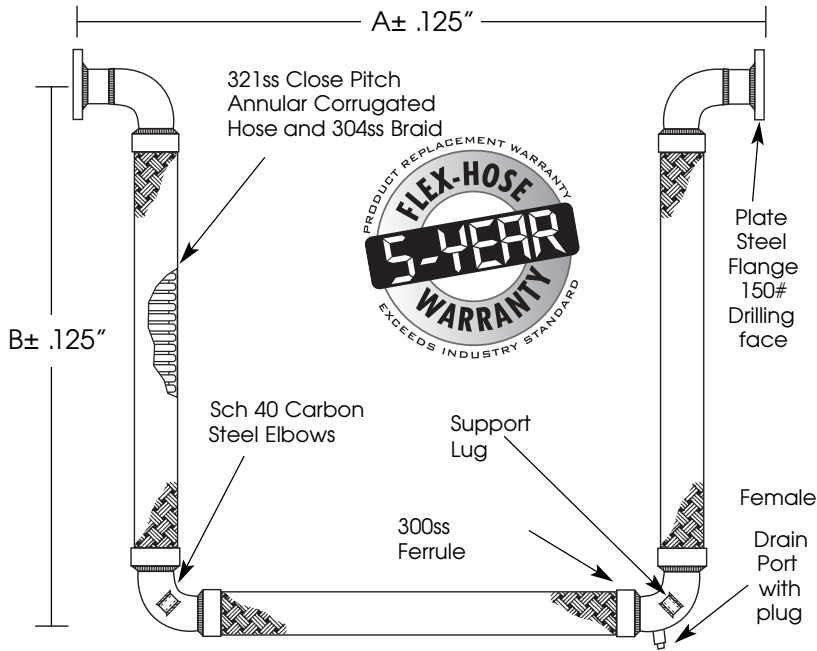

UL US
LISTED
EX28995
(Flexible Joint Fitting)


CSA CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.

Qty	I.D. (in.)	Dimensions		Pressure (PSI) @70° F	Movement Capability					Drain Port (in.)	Wt. (lb.)	Notes
		"A" (in.)	"B" (in.)		Compression (in.)	Extension (in.)	Parallel (in.)	Rotate "X" Axis (Deg.)	Non-parallel "Y" Axis (in.)			
	4.00	43.25	33.00	300	2.0	2.0	2.0	5°	1.0	¾"	86	
	5.00	57.00	44.50	300	2.0	2.0	2.0	5°	1.0	¾"	162	
	6.00	60.50	50.75	300	2.0	2.0	2.0	3°	1.0	¾"	211	

Working pressures shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor.

Provided with two braids.

Movement Capabilities

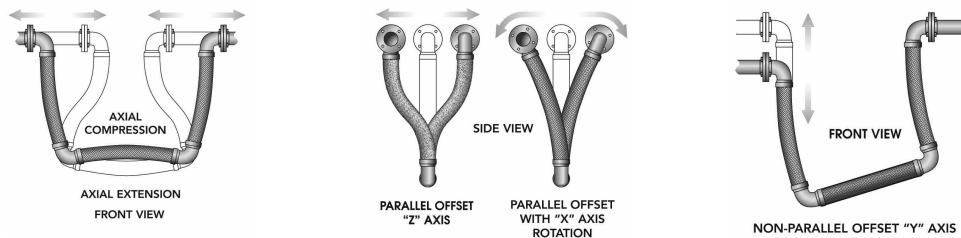

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road • Liverpool, NY USA 13088-2509
315-437-1611 • Fax 315-437-1903
www.flexhose.com • 1.877.TRI.FLEX