


# AssureFlex® Tri-Flex Loop® Expansion Loops & Seismic Connectors for Fire Protection



EX28995  
(Flexible Joint Fitting)



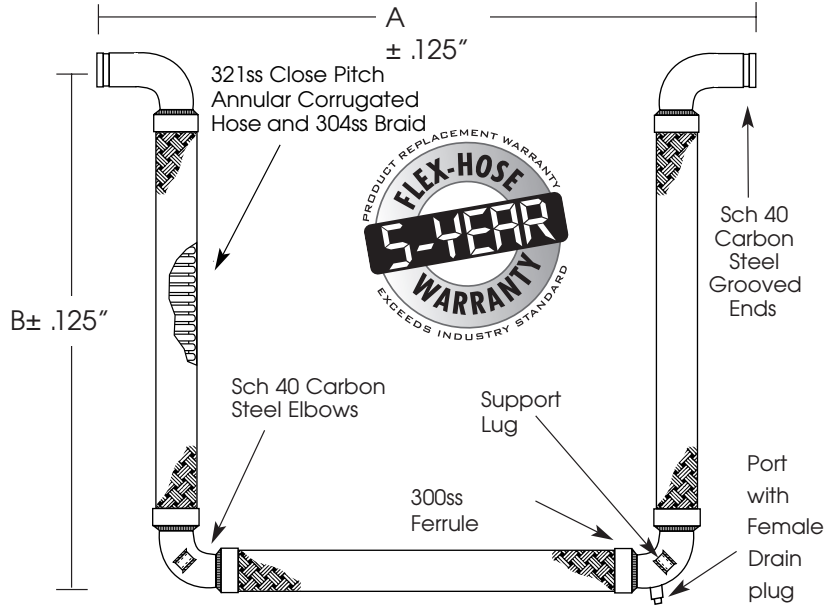


CSA standard B-51 certified.  
Inspected and tested by the  
Technical Standards and  
Safety Authority of Canada.

Qty	I.D. (in.)	Dimensions		Pressure (PSI) @ 70° F	Movement Capability					Drain Port (in.)	Wt. (lb.)	Notes
		"A" (in.)	"B" (in.)		Compression (in.)	Extension (in.)	Parallel (in.)	Rotate "X" Axis (Deg.)	Non-parallel "Y" Axis (in.)			
	4.00	55.75	50.50	300	8.0	8.0	8.0	10°	2.0	¾"	86	
	5.00	71.25	64.00	300	8.0	8.0	8.0	10°	2.0	¾"	178	
	6.00	77.00	67.50	300	8.0	8.0	8.0	5°	2.0	¾"	213	

Working pressures shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor. Provided with two braids.

## Movement Capability



PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road • Liverpool, NY USA 13088-2509  
315/437-1611 • Fax 315/437-1903  
[www.flexhose.com](http://www.flexhose.com) • 1.877.TRI FLEX