


AssureFlex® Try-Loop® Expansion Loops & Seismic Loops for Fire Protection

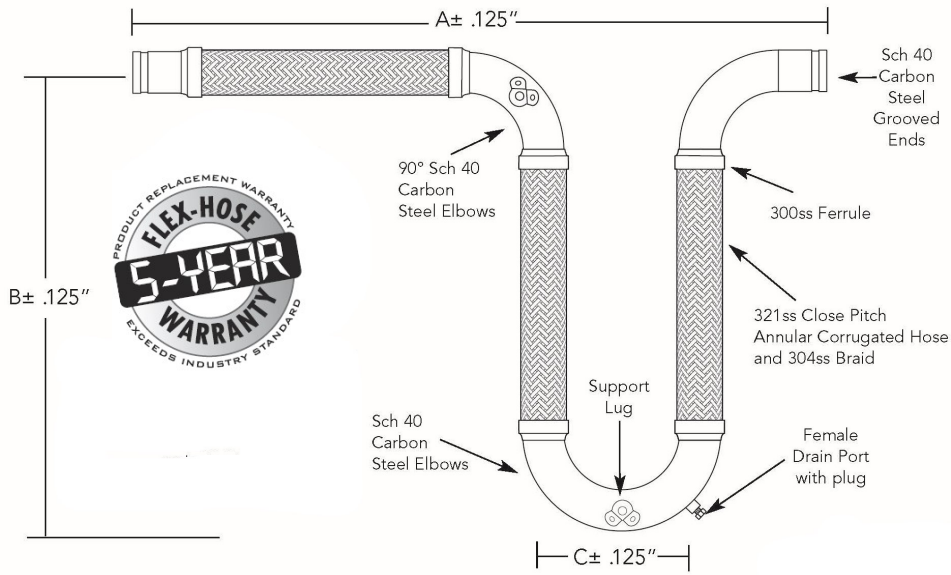

UL US LISTED
EX28995
(Flexible Joint Fitting)

CSA CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.


U.S. PATENT NO. 10,458,575 B2

Qty	I.D. (in.)	Dimensions			Pressure (PSI) @70° F	Movement Capability					Drain Port (in.)	Wt. (lb.)	Notes
		"A" (in.)	"B" (in.)	"C" (in.)		Compression (in.)	Extension (in.)	Parallel (in.)	Rotate "X" Axis (Deg.)	Non-Parallel "Y" Axis (in.)			
	4.00	48.75	33.00	12.00	300	2.0	2.0	2.0	5°	1.0	¾"	67	
	5.00	64.50	44.25	15.00	300	2.0	2.0	2.0	5°	1.0	¾"	128	
	6.00	74.38	50.75	18.00	300	2.0	2.0	2.0	3°	1.0	¾"	162	

Working pressure shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor.

Provided with two braids.

Tri-Loop Movement Capabilities

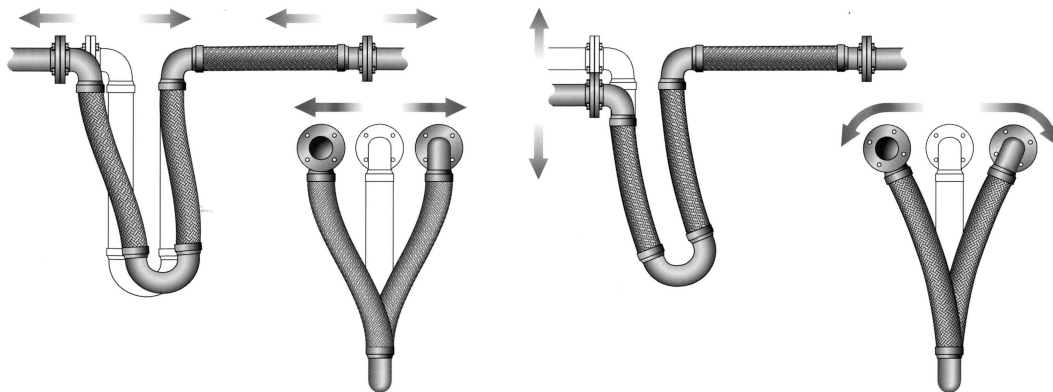

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	

fh FLEX-HOSE CO. INC.

4560 Buckley Road
Liverpool, New York USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX