


# AssureFlex® Try-Loop® Expansion Loops & Seismic Loops for Fire Protection



EX28995  
(Flexible Joint Fitting)

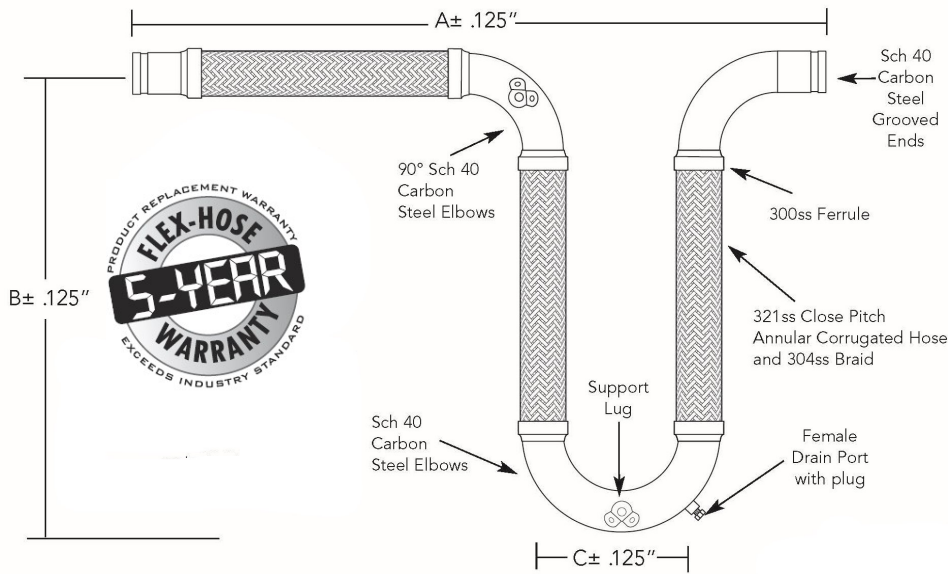


CSA standard B-51 certified.  
Inspected and tested by the  
Technical Standards and  
Safety Authority of Canada.

**U.S. PATENT NO.  
10,458,575 B2**

Qty	I.D. (in.)	Dimensions			Pressure (PSI) @70° F	Movement Capability					Drain Port (in.)	Wt. (lb.)	Notes
		"A" (in.)	"B" (in.)	"C" (in.)		Compression (in.)	Extension (in.)	Parallel (in.)	Rotate "X" Axis (Deg.)	Non- Parallel "Y" Axis (in.)			
	4.00	61.50	50.50	17.25	300	8.0	8.0	8.0	10°	2.0	¾"	105	
	5.00	78.25	69.00	18.38	300	8.0	8.0	8.0	10°	2.0	¾"	204	
	6.00	86.38	77.88	19.38	300	8.0	8.0	8.0	5°	2.0	¾"	249	

Working pressure shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor.  
Provided with two braids.

## Tri-Loop Movement Capabilities

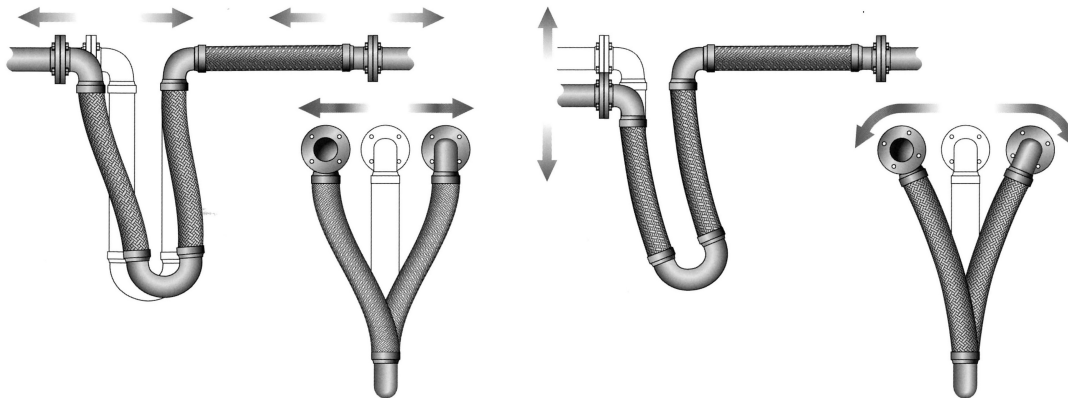

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road  
Liverpool, New York USA 13088-2509  
315/437-1611 • Fax 315/437-1903  
[www.flexhose.com](http://www.flexhose.com) • 1.877.TRI FLEX