


# AssureFlex® Two-Leg V Style Seismic and Expansion Loop for Fire Protection

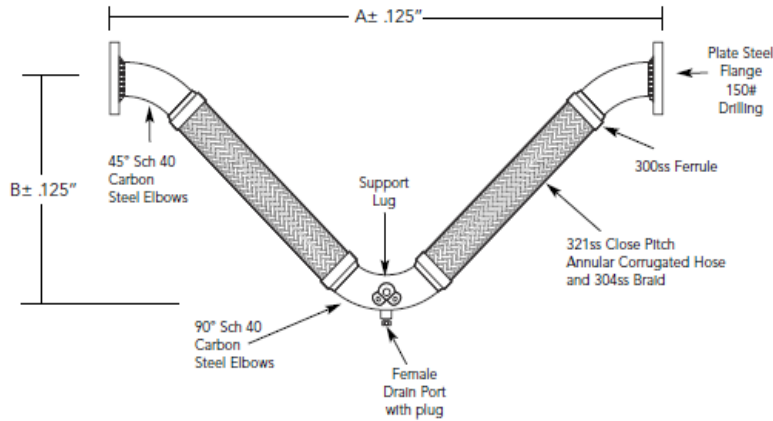

CSA standard B-51 certified.  
Inspected and tested by the  
Technical Standards and  
Safety Authority of Canada.

QTY.	I.D. (in.)	Length (in.)		Pressure (PSI) @70° F	Drain Port (in.)	Weight (lb.)	Comments
		A (in.)	B (in.)				
	2.00	43.88	18.25	300	1/2	18.0	
	2.50	50.25	20.75	300	3/4	29.0	
	3.00	54.50	22.88	300	3/4	36.0	
	4.00	57.13	25.50	175	3/4	50.0	
	5.00	67.00	29.88	175	3/4	75.0	
	6.00	75.50	33.38	175	3/4	105.0	
	8.00	88.25	38.25	175	3/4	204.0	
	10.00	105.25	45.38	175	3/4	329.0	
	12.00	122.5	52.38	175	3/4	496.0	

MOVEMENT CAPABILITY: +/- 4" Seismic, +/- 6" Thermal

8" - 12" ID provided with two stainless steel over braids.

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road  
Liverpool, NY USA 13088-2509  
315/437-1611 • Fax 315/437-1903  
[www.flexhose.com](http://www.flexhose.com) • 1.877.TRI FLEX